




REV#		REV	DESCRIPTION	DATE	BY
	A		INITIAL RELEASE	7/23/10	HC

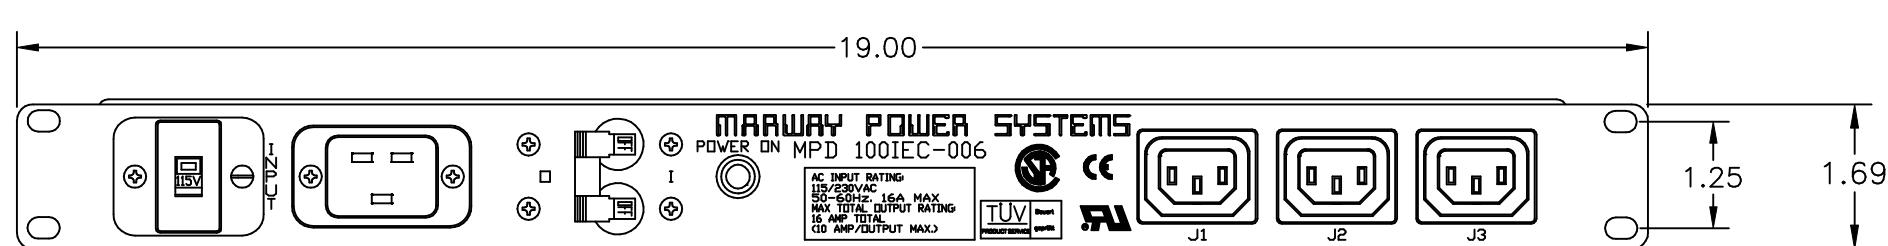

FRONT VIEW

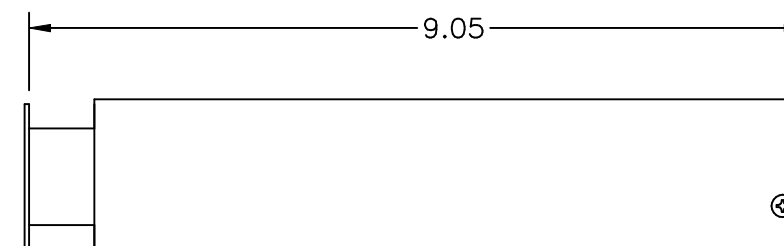

SIDE VIEW

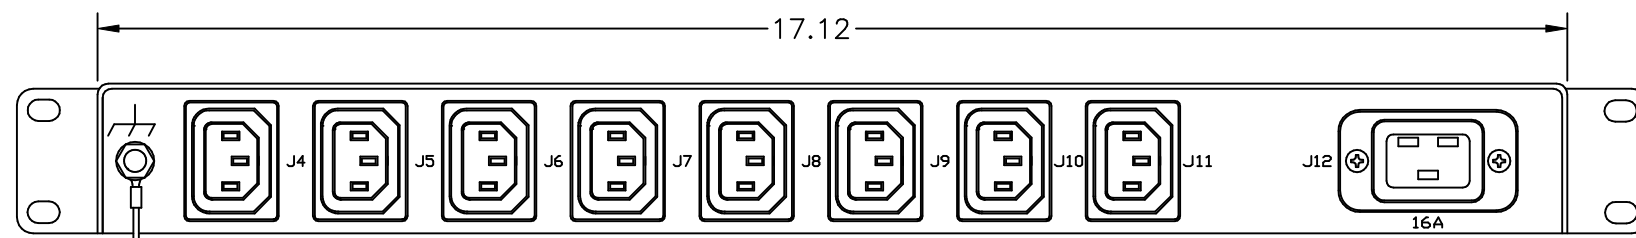

REAR VIEW

Configuration	Type	Basic
	Layout	1 U
Input 1	Voltage	115/230 VAC Selectable, Single Phase, 50/60 Hz
	Max Current	20 Amps
	Max Load	1.84 KVA or 3.68 KVA
	Connection	C20
	Voltage Monitor	None
	Current Monitor	None
Outlets	All Panels [1][2]	(11) C13, 115/230V (1) C19, 115/230V
Protection	Spike/Surge Suppression [1]	Yes
	EMI Filter [1]	Yes
	Over Current [1]	(1) 20A Main Breaker
Env Sensors	Temperature	None
	Humidity	None
	Interlocks	None
	EPO	None
Communications	Display	None
	Serial	None
	Ethernet	None
	Protocols	None

Physical	Dimensions	1 U x 19" W x 9" D
	Weight	lbs
	Materials	Chassis: Steel
	Finishes	Chassis: Zinc plated Gold, FrontPanel: Zinc plated Gold
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.com/warranty
	Safety Certifications	CE, UL, CSA
	Environment Certifications	None
Notes:		
[1] Certain details of the circuitry may only be revealed by the schematic (available separately)		
[2] S = switched, V = monitored voltage, A = monitored amps		

PROPRIETARY NOTICE
ALL PATENT OR OTHER PROPRIETARY RIGHTS PERTAINING TO THE ITEMS SOLD HERE UNDER SHALL REMAIN THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS EXCEPT THAT THE PURCHASER SHALL HAVE THE RIGHT TO USE SUCH ITEMS FOR THEIR INTENDED PURPOSE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		DRAWN		DATE	
ANGLES	DECIMALS	METAL NO.	SILK NO.		
± 1/2"	.XXX ± .03	APPROVALS			
DO NOT SCALE DRAWING	.XXX ± .010				
MATERIAL:		CHECKED	HC	7/23/10	
FINISH:		APPROVED			
MARWAY POWER SOLUTIONS		SPECIFICATION DRAWING—		REV	
17500 GILLETTE AVE. IRVINE, CA 92614 Ph (714) 917-6200 Fax (714) 917-6253 TOLL FREE 800 462-7929		MPD 100IEC-006		A	
SIZE	FSCM NO.	DWG NO.			
D	60955	100IEC-006			
SCALE	NONE	P100IEC-006 REV A	SHEET 1 OF 1		