

7	6	5	↓ 4	3



5

FRONT VIEW

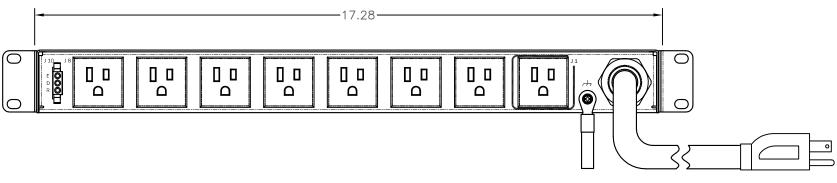

<u>REAR VIEW</u>


Configuration	Features	rEPO, Seq, EMI, Srg	
	Layout	10	
Input 1	Voltage	120 Vac, Single Phase, 50/60 Hz	
	Max Current	15 Amps	
	Max Load	1.44 KVA	
	Connection	5-15P, 9 ft cord, 3-wire 14 ga, SJT jacket (Rear panel)	
	Voltage Monitor	None	
	Current Monitor	None	
Outlets	All Panels [1][2]	(1) 5-15R, 120V	
		(8) 5-15R, 120V (S)	
Protection	Spike/Surge Suppression [1]	Yes	
	EMI Filter [1]	Yes	
	Over Current [1]	(1) 15A Main Breaker	
Env Sensors	Temperature	2	
	Humidity	2	
	Interlocks	None	
	EPO	Remote EPO Type N.O./N.O.	
Communications	Display	None	
	Serial	RS-232 (RJ-45)	
	Ethernet	10T/100T Auto	
	Protocols	HTTP, HTTPS, Telnet, SSH, FTP, SMTP, SNMPv2, SNMPv3, SNTP, AlertLog	

6

Dimensions	1 U x 19" W x 13" D	
Weight	lbs	
Materials	Chassis: Steel	
Finishes	Chassis: Zinc plated Blac	
Temperature	32°F to 122°F	
Humidity	5 %RH to 85 %RH	
Elevation	25,000 feet	
Warranty	http://www.marway.com	
Safety Certifications	None	
Environment Certifications	None	
	Weight Materials Finishes Temperature Humidity Elevation Warranty Safety Certifications	

[1] Certain details of the circuitry may only be revealed by the schematic (available separately)[2] S = switched, V = monitored voltage, A = monitored amps

4

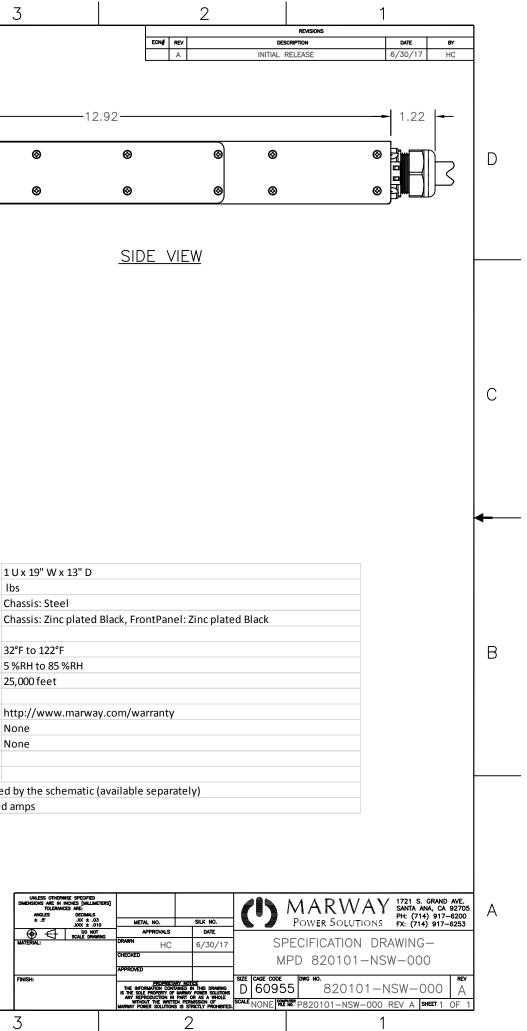

В

D

С

8

А

8

7