
| 7 | 6 | 5 | 4 | 3 |
|---|---|---|---|---|
|   |   |   |   |   |



## FRONT VIEW

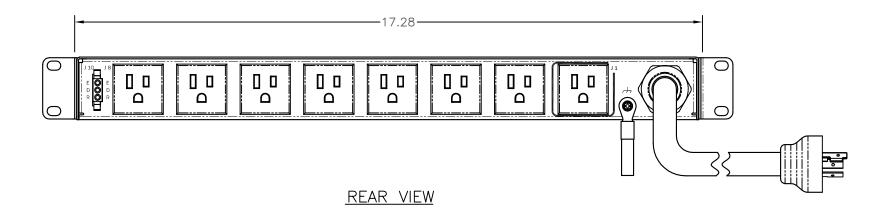

| Configuration  | Features                    | rEPO, Seq, EMI, Srg   | Physical   | Dimensions                 | 1 U x 19" W x 13" D   |
|----------------|-----------------------------|---|--|----------------------------|---|
|                | Layout                      | 1 U   |  | Weight                     | lbs   |
|                |                             |   |  | Materials                  | Chassis: Steel  |
| Input 1        | Voltage                     | 120 Vac, Single Phase, 50/60 Hz                                     |  | Finishes                   | Chassis: Zinc plated B  |
|                | Max Current                 | 30 Amps   |  |                            |   |
|                | Max Load                    | 2.88 KVA  | Operating  | Temperature                | 32°F to 122°F   |
|                |                             |   |  | Humidity                   | 5 %RH to 85 %RH   |
|                | Connection                  | L5-30P, 9 ft cord, 3-wire 10 ga, SJT jacket (Rear panel)            |  | Elevation                  | 25,000 feet   |
|                | Voltage Monitor             | None  |  |                            |   |
|                | Current Monitor             | None  | Conformance  | Warranty                   | http://www.marway.  |
|                |                             |   |  | Safety Certifications      | None  |
| Outlets        | All Panels [1][2]           | (1) 5-15R, 120V   |  | Environment Certifications | None  |
|                |                             | (8) 5-15R, 120V (S)   |  |                            |   |
|                |                             |   | Notes:   |                            |   |
| Protection     | Spike/Surge Suppression [1] | Yes   | s [1] Certain details of the circuitry may only be revealed by the schem |                            | ed by the schematic (avai   |
|                | EMI Filter [1]              | Yes   | [2] S = switched, V = monitored voltage, A = monitored amps              |                            |   |
|                | Over Current [1]            | (2) 15A Circuit Breaker   |  |                            |   |
| Env Sensors    | Temperature                 | 2   |  |                            |   |
|                | Humidity                    | 2   |  |                            |   |
|                | Interlocks                  | None  |  |                            |   |
|                | EPO                         | Remote EPO Type N.O./N.O.   |  |                            | UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN INCHES [MILLIMETERS]<br>TOLERANCES ARE: |
| Communications | Display                     | None  |  |                            | ANGLES DECIMALS<br>±.5' JOX ±.03<br>JOX ±.010<br>DO NOT<br>SCALE DRAWING<br>MATERIAL:   |
|                | Serial                      | RS-232 (RJ-45)  |  |                            | MATERIAL:   |
|                | Ethernet                    | 10T/100T Auto   |  |                            |   |
|                | Protocols                   | HTTP, HTTPS, Telnet, SSH, FTP, SMTP, SNMPv2, SNMPv3, SNTP, AlertLog |  |                            | FINISH:   |

6

5

В

D


С

8

А

8

7

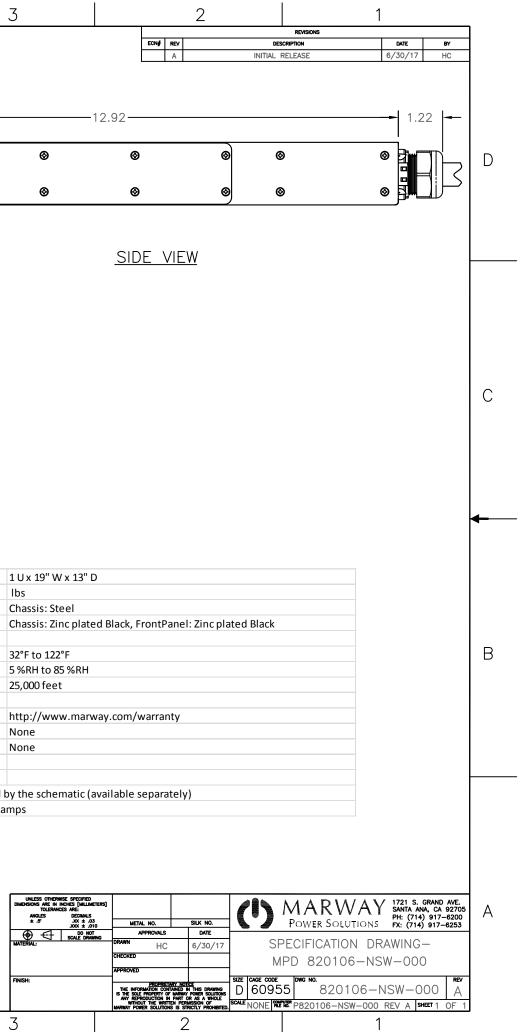

3

4