

D

C

B


A

D


C

B


A

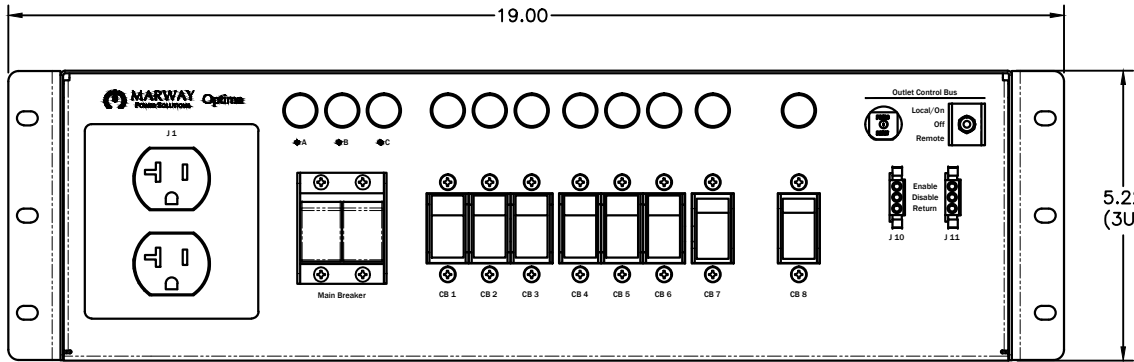

FRONT VIEW

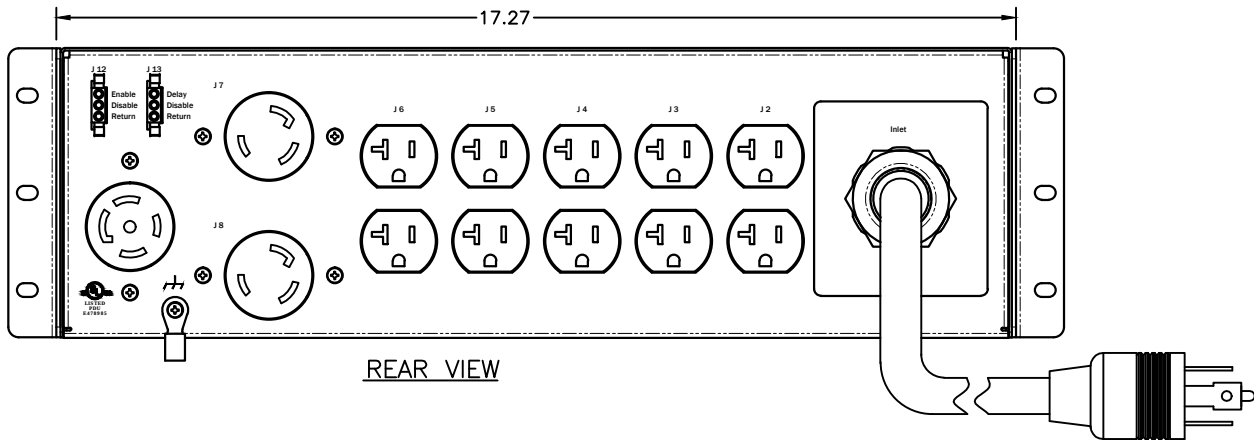

REAR VIEW

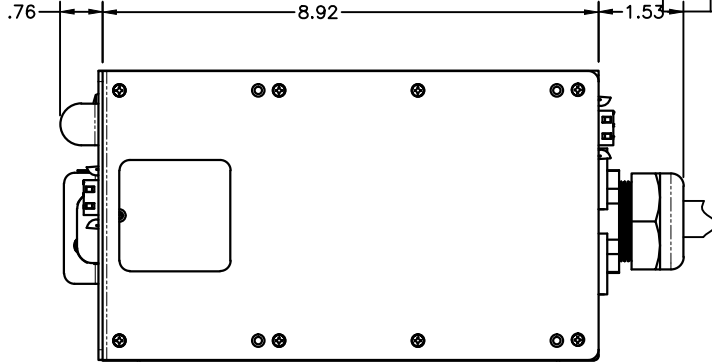

SIDE VIEW

Configuration	Features	rEPO, EMI, Srg
	Layout	3 U
Input 1	Voltage	120/208 Vac, 3-Phase Wye, 50/60 Hz
	Max Current	30 Amps
	Max Load	2.88 KVA, 8.63 KVA
	Connection	L21-30P, 9 ft cord, 5-wire 10 ga, Other jacket (Front panel)
Outlets	Voltage Monitor	None
	Current Monitor	None
	All Panels [1][2]	(2) 5-20R, 120V (10) 5-20R, 120V (S) (1) L21-30R, 208V (S) (2) L5-30R, 208V (S)
	Protection	Spike/Surge Suppression [1] Yes EMI Filter [1] Yes Over Current [1] (1) 30A Main Breaker (2) 30A Circuit Breaker (6) 20A Circuit Breaker
Env Sensors	Temperature	None
	Humidity	None
	Interlocks	None
	EPO	Remote EPO Type N.O./N.O.
Communications	Display	None
	Serial	None
	Ethernet	None
	Protocols	None

Physical	Dimensions	3 U x 19" W x 9" D
	Materials	Chassis: Steel
	Finishes	Chassis: Painted Black, FrontPanel: Painted Black
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	6,562 feet
Conformance	Warranty	http://www.marway.com/warranty
	Safety Certifications	UL
	Environment Certifications	None
Notes:		
[1] Certain details of the circuitry may only be revealed by the schematic (available separately)		
[2] S = switched, V = monitored voltage, A = monitored amps		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ANGLES
± .5°
DO NOT SCALE DRAWING

MATERIAL:

FINISH:

METAL NO.

SILK NO.

APPROVALS

DATE

DRAWN

CHECKED

APPROVED

THE INFORMATION CONTAINED IN THIS DRAWING
IS THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS
ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MARWAY POWER SOLUTIONS IS STRICTLY PROHIBITED.

PROPRIETARY NOTICE

SIZE

CAGE CODE

DWG NO.

SCALE

COMPUTER
FILE NO.

REV

MARWAY
POWER SOLUTIONS

1721 S. GRAND AVE.
SANTA ANA, CA 92705
PH: (714) 917-6200
FX: (714) 917-6253

SPECIFICATION DRAWING—
MPD 533012-000

533012-000

1 OF 1