




| ECO# |  | REV | DESCRIPTION     | DATE    | BY |
|------|--|-----|-----------------|---------|----|
|      |  | A   | INITIAL RELEASE | 7/23/10 | HC |

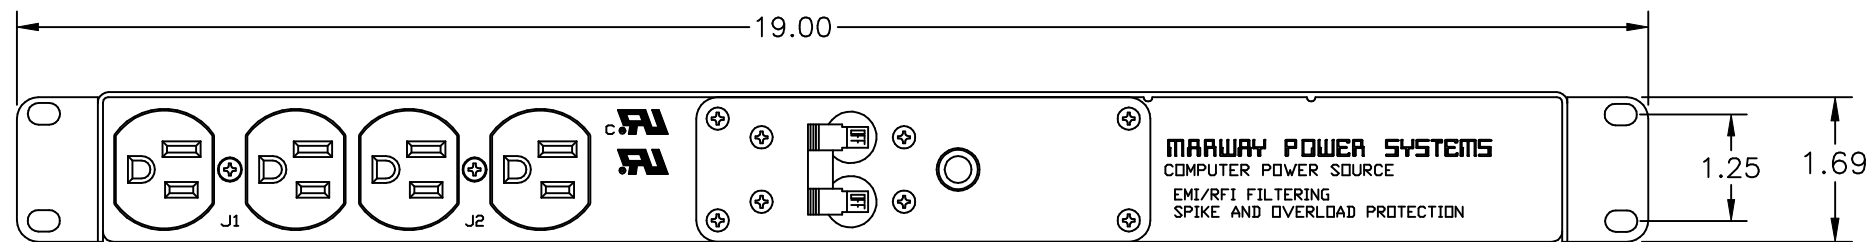

FRONT VIEW

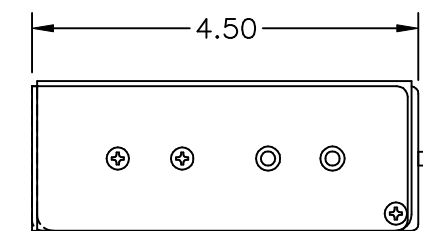

SIDE VIEW

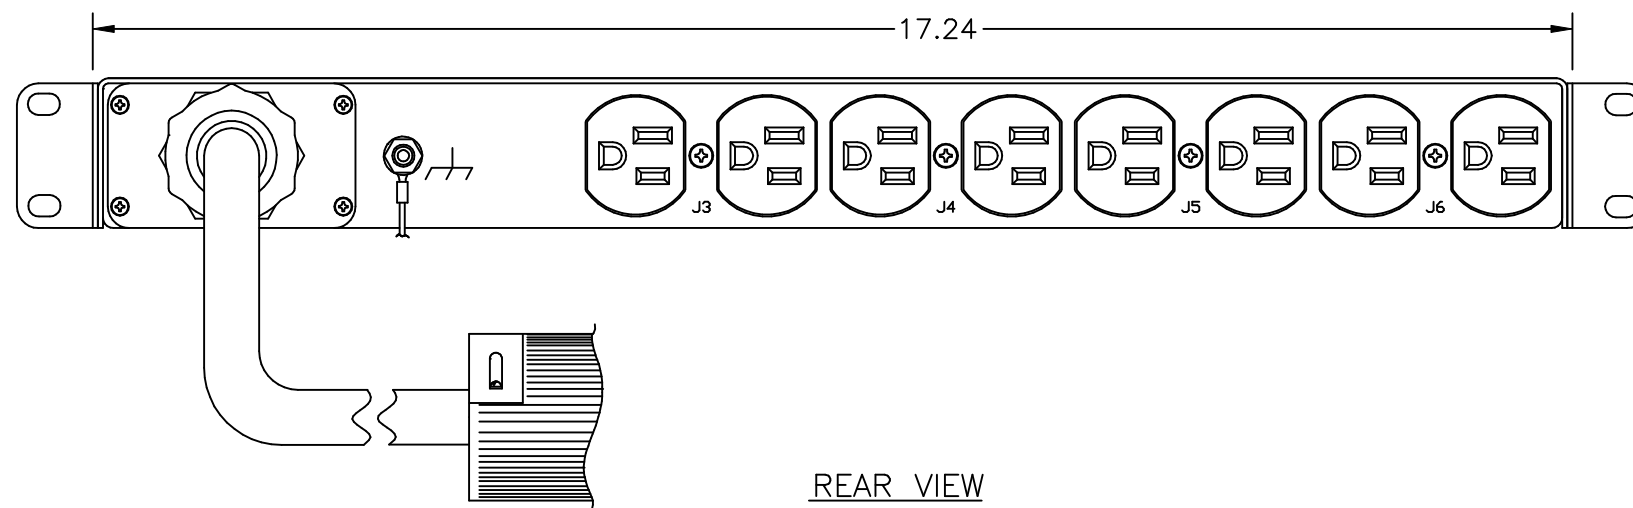

REAR VIEW

|                |                             |   |
|----------------|-----------------------------|---|
| Configuration  | Type                        | Basic   |
|                | Layout                      | 1 U   |
| Input 1        | Voltage                     | 120 VAC, Single Phase, 50/60 Hz                         |
|                | Max Current                 | 20 Amps   |
|                | Max Load                    | 1.92 KVA  |
|                | Connection                  | L5-20P, 9 ft cord, 3-wire 12 ga, SO jacket (Rear panel) |
|                | Voltage Monitor             | None  |
|                | Current Monitor             | None  |
| Outlets        | All Panels [1][2]           | (12) 5-15R, 120V  |
| Protection     | Spike/Surge Suppression [1] | Yes   |
|                | EMI Filter [1]              | Yes   |
|                | Over Current [1]            | (1) 20A Main Breaker                                    |
| Env Sensors    | Temperature                 | None  |
|                | Humidity                    | None  |
|                | Interlocks                  | None  |
|                | EPO                         | None  |
| Communications | Display                     | None  |
|                | Serial                      | None  |
|                | Ethernet                    | None  |
|                | Protocols                   | None  |

|             |                            |   |
|-------------|----------------------------|---|
| Physical    | Dimensions                 | 1 U x 19" W x 4.5" D  |
|             | Weight                     | lbs   |
|             | Materials                  | Chassis: Steel  |
|             | Finishes                   | Chassis: Zinc plated Gold, FrontPanel: Zinc plated Gold                     |
| Operating   | Temperature                | 32F to 122F   |
|             | Humidity                   | 5 %RH to 85 %RH   |
|             | Elevation                  | 25,000 feet   |
| Conformance | Warranty                   | <a href="http://www.marway.com/warranty">http://www.marway.com/warranty</a> |
|             | Safety Certifications      | UL, CUL   |
|             | Environment Certifications | None  |

Notes:

[1] Certain details of the circuitry may only be revealed by the schematic (available separately)

[2] S = switched, V = monitored voltage, A = monitored amps

**PROPRIETARY NOTICE**  
 ALL PATENT OR OTHER PROPRIETARY RIGHTS PERTAINING TO THE ITEMS SOLD HERE UNDER SHALL REMAIN THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS EXCEPT THAT THE PURCHASER SHALL HAVE THE RIGHT TO USE SUCH ITEMS FOR THEIR INTENDED PURPOSE.

|   |          |               |          |
|---|----------|---------------|----------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:<br>ANGLES DECIMALS<br>± 1/2° .03<br>.XXX ± .010<br>DO NOT SCALE DRAWING |          | METAL NO.     | SILK NO. |
| APPROVALS   |          | DATE          |          |
| MATERIAL:   | DRAWN    | HC            | 7/23/10  |
|   | CHECKED  |               |          |
|   | APPROVED |               |          |
| FINISH:   |          |               |          |
| DRAWN BY: HC  |          | DATE: 7/23/10 |          |
| SCALE: NONE   |          | P80-002 REV A |          |

**MARWAY POWER SOLUTIONS**  
 17500 GILLETTE AVE.  
 IRVINE, CA 92614  
 Ph (714) 917-6200  
 FAX (714) 917-6253  
 TOLL FREE 800 462-7929

**SPECIFICATION DRAWING—**  
 MPD 80-002

SIZE: D FSCM NO. 60955 DWG NO. 80-002 REV A  
 SCALE: NONE SHEET 1 OF 1