
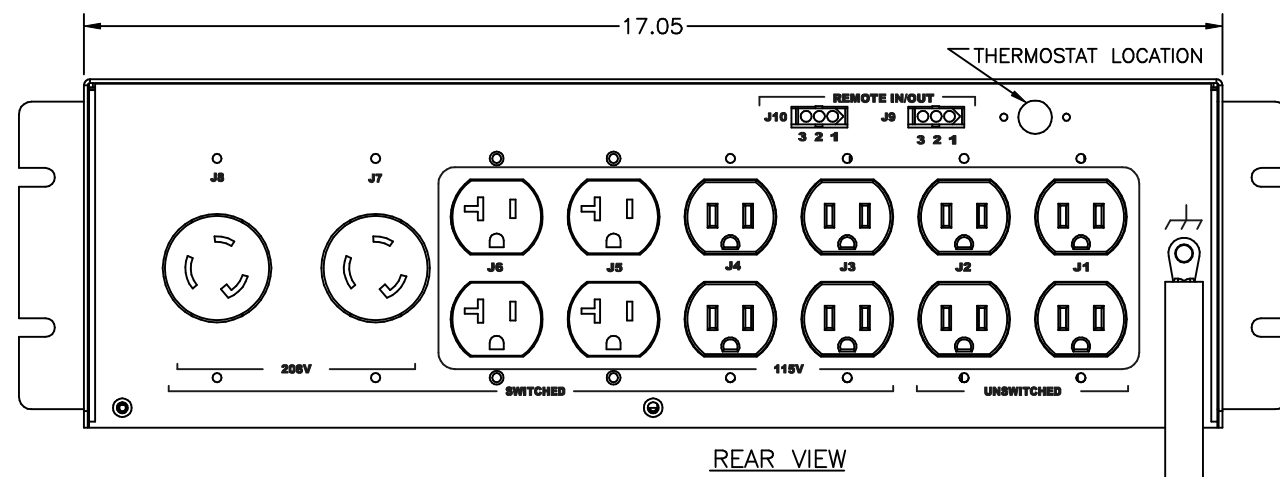


REV#		REV	DESCRIPTION	DATE	BY
A			INITIAL RELEASE	8/13/12	HC

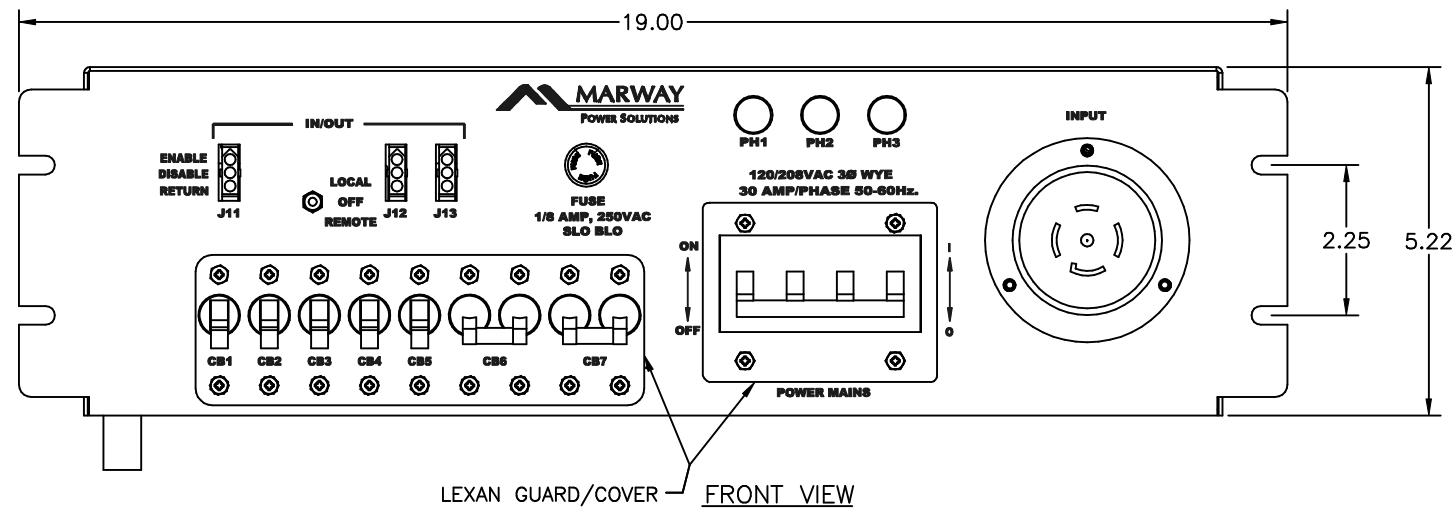

Configuration	Type	Basic
	Layout	3 U
Input 1	Voltage	120/208 VAC, 3-Phase Wye, 50/60 Hz
	Max Current	30 Amps
	Max Load	8.63 KVA
	Connection	L21-30P
	Voltage Monitor	None
	Current Monitor	None
Outlets	All Panels [1][2]	(4) 5-15R, 120V (4) 5-15R, 120V (S) (2) 5-20R, 120V (S) (2) L5-20R, 120V (S) (2) L6-30R, 120V (S)
Protection	Spike/Surge Suppression [1]	Yes
	EMI Filter [1]	Yes
	Over Current [1]	(1) 30A Main Breaker (2) 30A Circuit Breaker (2) 20A Circuit Breaker (3) 15A Circuit Breaker
Env Sensors	Temperature	None
	Humidity	None
	Interlocks	1
	EPO	None

Communications	Display	None
	Serial	None
	Ethernet	None
	Protocols	None
Physical	Dimensions	3 U x 19" W x 12" D
	Weight	lbs
	Materials	Chassis: Steel
	Finishes	Chassis: Zinc plated Gold, FrontPanel: Zinc plated Black
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.com/warranty
	Safety Certifications	None
	Environment Certifications	None
Notes:		
	[1] Certain details of the circuitry may only be revealed by the schematic (available separately)	
	[2] S = switched, V = monitored voltage, A = monitored amps	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		METAL NO.		SILK NO.		
ANGLES	DECIMALS	APPROVALS		DATE		
± .01	.XX ± .03	DRAWN	HC	8/13/12		
DO NOT SCALE DRAWING	.XXX ± .010	CHECKED				
FINISH:		APPROVED				
DISCREPANCY NOTICE: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MARWAY POWER SOLUTIONS IS STRICTLY PROHIBITED.		SIZE	CAGE CODE	DWG NO.	REV	
		D	60955	P208A-162	A	
		SCALE	NONE	P208A-162 REV A	SHEET 1 OF 1	

MARWAY POWER SOLUTIONS 1721 S. GRAND AVE. SANTA ANA, CA 92705 PH: (714) 917-8200 FX: (714) 917-8253

SPECIFICATION DRAWING—MPD 208A-162