


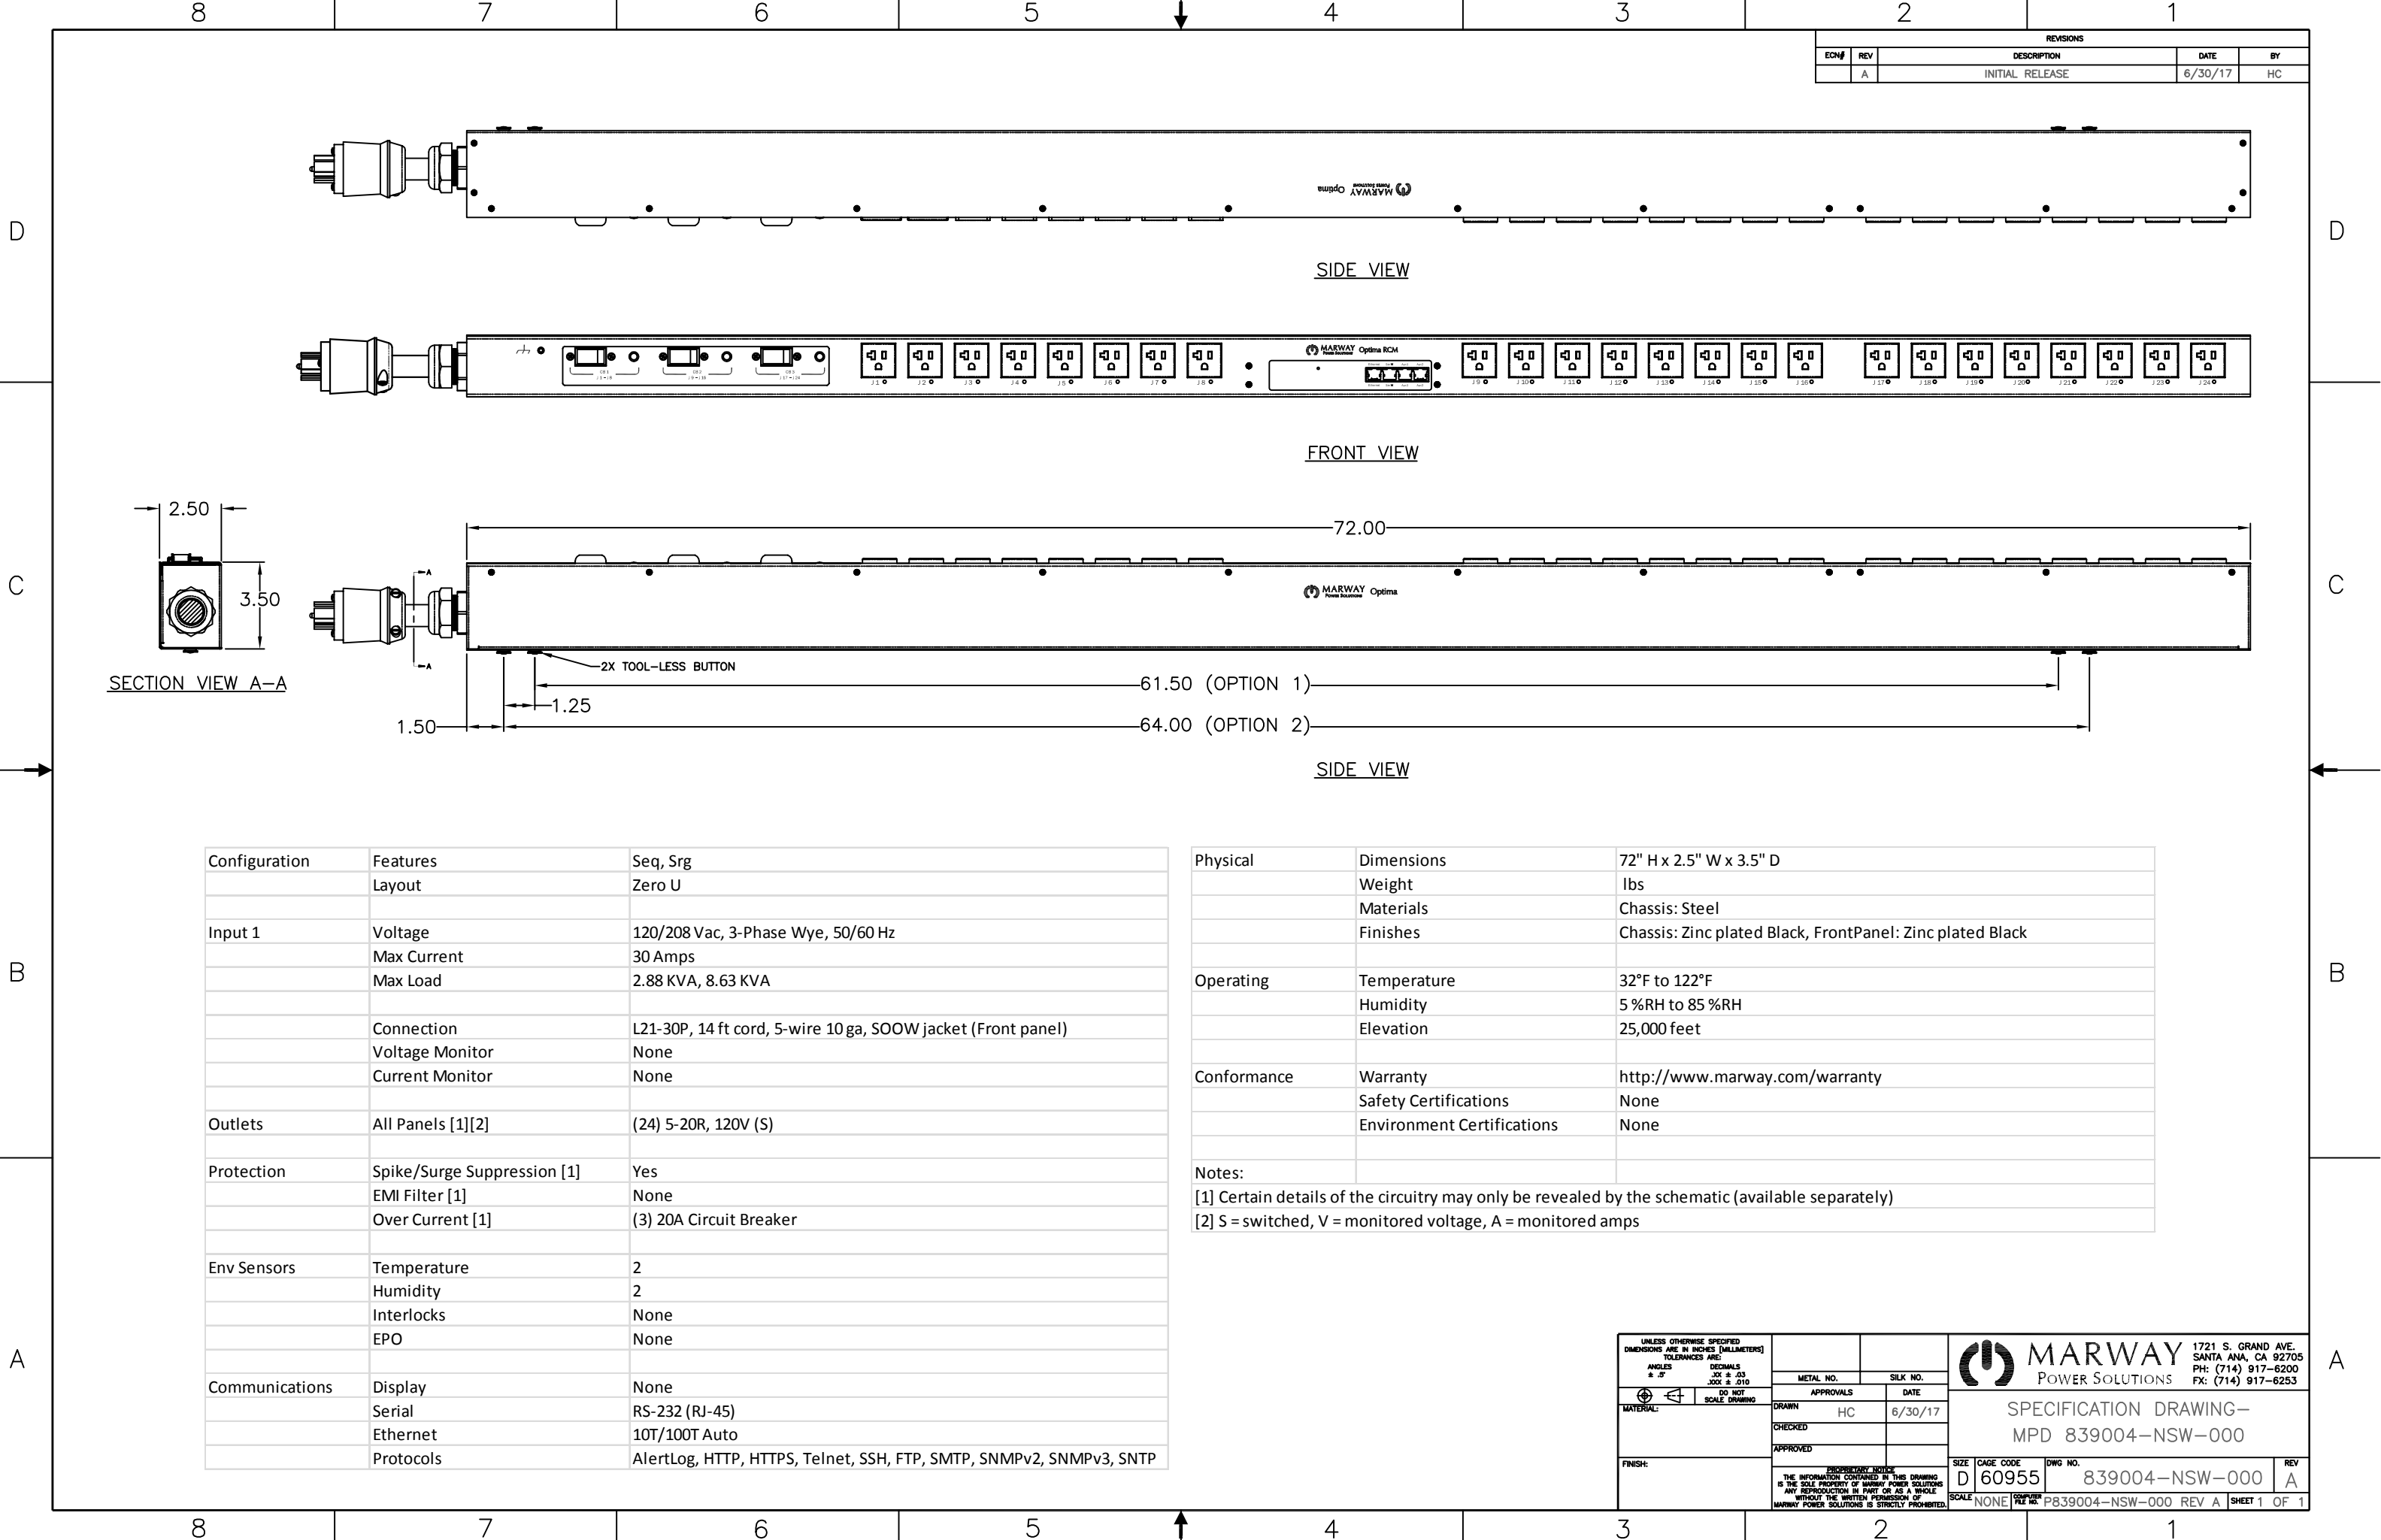

| REVISIONS |     |                 |         |    |
|-----------|-----|-----------------|---------|----|
| ECN#      | REV | DESCRIPTION     | DATE    | BY |
|           | A   | INITIAL RELEASE | 6/30/17 | HC |

|                |                             |                                                                     |
|----------------|-----------------------------|---------------------------------------------------------------------|
| Configuration  | Features                    | Seq, Srg                                                            |
|                | Layout                      | Zero U                                                              |
| Input 1        | Voltage                     | 120/208 Vac, 3-Phase Wye, 50/60 Hz                                  |
|                | Max Current                 | 30 Amps                                                             |
|                | Max Load                    | 2.88 KVA, 8.63 KVA                                                  |
|                |                             |                                                                     |
|                | Connection                  | L21-30P, 14 ft cord, 5-wire 10 ga, SOOW jacket (Front panel)        |
|                | Voltage Monitor             | None                                                                |
|                | Current Monitor             | None                                                                |
|                |                             |                                                                     |
| Outlets        | All Panels [1][2]           | (24) 5-20R, 120V (S)                                                |
|                |                             |                                                                     |
| Protection     | Spike/Surge Suppression [1] | Yes                                                                 |
|                | EMI Filter [1]              | None                                                                |
|                | Over Current [1]            | (3) 20A Circuit Breaker                                             |
| Env Sensors    | Temperature                 | 2                                                                   |
|                | Humidity                    | 2                                                                   |
|                | Interlocks                  | None                                                                |
|                | EPO                         | None                                                                |
| Communications | Display                     | None                                                                |
|                | Serial                      | RS-232 (RJ-45)                                                      |
|                | Ethernet                    | 10T/100T Auto                                                       |
|                | Protocols                   | AlertLog, HTTP, HTTPS, Telnet, SSH, FTP, SMTP, SNMPv2, SNMPv3, SNTP |

|                                                                                                   |                            |                                                                             |
|---------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------------------------------------------------|
| Physical                                                                                          | Dimensions                 | 72" H x 2.5" W x 3.5" D                                                     |
|                                                                                                   | Weight                     | lbs                                                                         |
|                                                                                                   | Materials                  | Chassis: Steel                                                              |
|                                                                                                   | Finishes                   | Chassis: Zinc plated Black, FrontPanel: Zinc plated Black                   |
| Operating                                                                                         | Temperature                | 32°F to 122°F                                                               |
|                                                                                                   | Humidity                   | 5 %RH to 85 %RH                                                             |
|                                                                                                   | Elevation                  | 25,000 feet                                                                 |
| Conformance                                                                                       | Warranty                   | <a href="http://www.marway.com/warranty">http://www.marway.com/warranty</a> |
|                                                                                                   | Safety Certifications      | None                                                                        |
|                                                                                                   | Environment Certifications | None                                                                        |
| Notes:                                                                                            |                            |                                                                             |
| [1] Certain details of the circuitry may only be revealed by the schematic (available separately) |                            |                                                                             |
| [2] S = switched, V = monitored voltage, A = monitored amps                                       |                            |                                                                             |

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES [MILLIMETERS]  
TOLERANCES ARE:  
ANGLES ± .07  
DECIMALS  
XXX ± .03  
XXX ± .010

DO NOT  
SCALE DRAWING

MATERIAL:

FINISH:

METAL NO.

SILK NO.

APPROVALS

DATE

DRAWN

CHECKED

APPROVED

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MARWAY POWER SOLUTIONS IS STRICTLY PROHIBITED.

PROPRIETARY NOTICE

1721 S. GRAND AVE.  
SANTA ANA, CA 92705  
PH: (714) 917-6200  
FX: (714) 917-6253

MARWAY  
POWER SOLUTIONS

SPECIFICATION DRAWING—  
MPD 839004-NSW-000

SIZE

CAGE CODE

DWG NO.

REV

D

60955

839004-NSW-000

A

SCALE

COMPUTER FILE NO.

P839004-NSW-000 REV A

SHEET 1 OF 1