


Configuration	Features	VMtr, AMtr, Seq, Srg	
	Layout	10	
Input 1	Voltage	200-240 Vac, Single Phase, 50/60 Hz	
	Max Current	20 Amps	
	Max Load	3.84 KVA	
	Connection	L6-20P, 9 ft cord, 3-wire 12 ga, SJT jacket (Rear panel)	
	Voltage Monitor	Digital, ±1% Full Scale	
	Current Monitor	Digital, ±1% Full Scale	
Outlets	All Panels [1][2]	(1) C13, 200-240V	
		(8) C13, 200-240V (S)	
Protection	Spike/Surge Suppression [1]	Yes	
	EMI Filter [1]	None	
	Over Current [1]	(1) 20A Main Breaker	
Env Sensors	Temperature	2	
	Humidity	2	
	Interlocks	None	
	EPO	None	
Communications	Display	Multi-function Controller	
	Serial	RS-232 (RJ-45)	
	Ethernet	10T/100T Auto	
	Protocols	HTTP, HTTPS, Telnet, SSH, FTP, SMTP, SNMPv2, SNMPv3, SNTP, AlertLog	

Physical	Dimensions	1 U x 19" W x 9" D
	Weight	lbs
	Materials	Chassis: Steel
	Finishes	Chassis: Zinc plated Black,
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.com
	Safety Certifications	None
	<b>Environment Certifications</b>	None
Notes:		
[1] Certain details	s of the circuitry may only be revea	led by the schematic (availab
[2] S = switched, \	<pre>/ = monitored voltage, A = monitor</pre>	ed amps

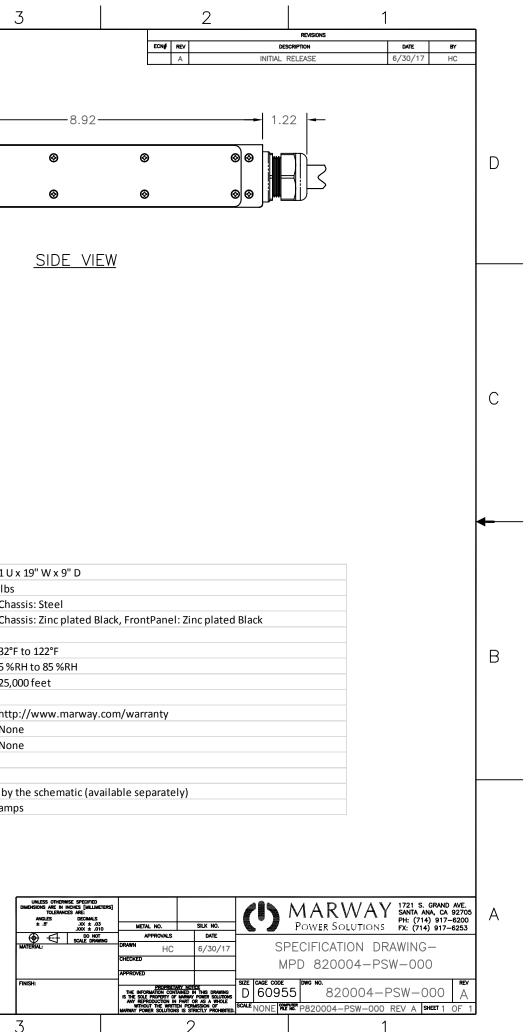

А

D

С

В