
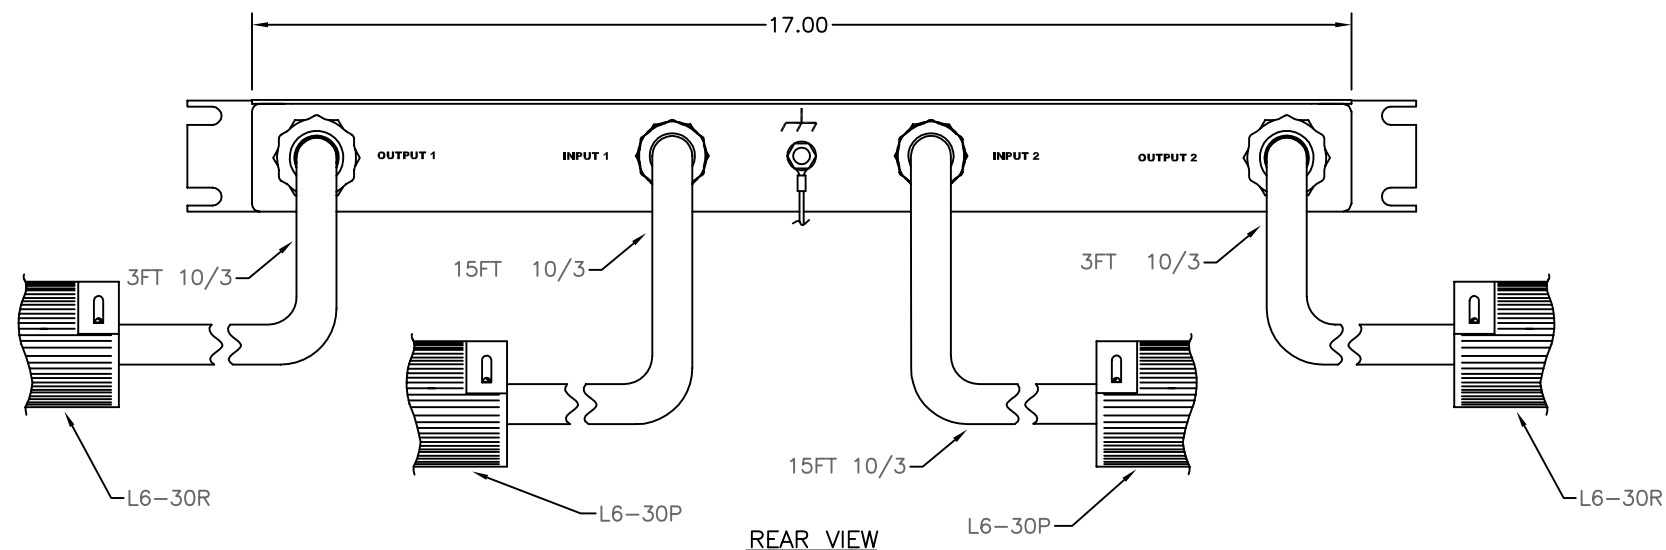


REVISIONS				
ECN#	REV	DESCRIPTION	DATE	BY
	A	INITIAL RELEASE	8/9/13	HC
	B	240V WAS 220V, 5.76kVA WAS 5.28kVA	4/14/20	HC

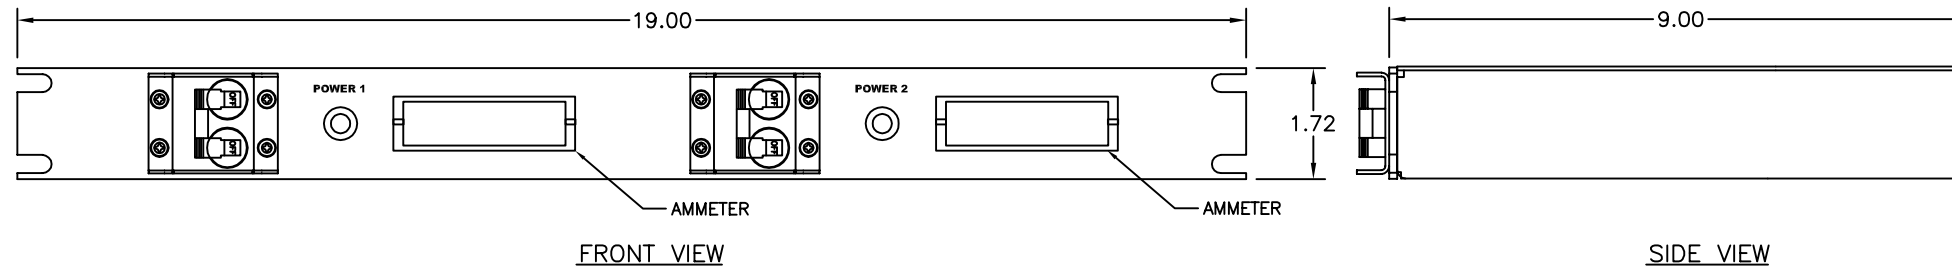

Configuration	Type	Metered
	Layout	1 U
Input 1	Voltage	240 VAC, Single Phase, 50/60 Hz
	Max Current	30 Amps
	Max Load	5.76 KVA
	Connection	L6-30P, 15 ft cord, 3-wire 10 ga, SO jacket (Rear panel)
	Voltage Monitor	None
Input 2	Voltage	240 VAC, Single Phase, 50/60 Hz
	Max Current	30 Amps
	Max Load	5.76 KVA
	Connection	L6-30P, 15 ft cord, 3-wire 10 ga, SO jacket (Rear panel)
Outlets	All Panels [1][2]	(2) L6-30R, 220V
	Protection	Spike/Surge Suppression [1] Yes EMI Filter [1] Yes Over Current [1] (2) 30A Main Breaker
	Env Sensors	Temperature None Humidity None Interlocks None EPO None

Communications	Display	None
	Serial	None
	Ethernet	None
	Protocols	None
Physical	Dimensions	1 U x 19" W x 9" D
	Weight	lbs
	Materials	Chassis: Steel
	Finishes	Chassis: Zinc plated Gold, FrontPanel: Zinc plated Gold
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.com/warranty
	Safety Certifications	None
	Environment Certifications	None
Notes:		
[1] Certain details of the circuitry may only be revealed by the schematic (available separately)		
[2] S = switched, V = monitored voltage, A = monitored amps		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ANGLES DECIMALS ± .5° .XX ± .03 XXX ± .010 DO NOT SCALE DRAWING	METAL NO.	SILK NO.	<p>1721 S. GRAND AVE. SANTA ANA, CA 92705 PH: (714) 917-6200 FX: (714) 917-6253</p>	
	APPROVALS			DATE
	DRAWN			8/9/13
	CHECKED			
FINISH:	APPROVED			
	<small>PROPRIETARY NOTICE</small> <small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MARWAY POWER SOLUTIONS IS STRICTLY PROHIBITED.</small>			
SIZE	CAGE CODE	DWG NO.	REV	
D	60955	P411341-025	B	
SCALE	COMPUTER FILE NO. P411341-025 REV B SHEET 1 OF 1			