



FRONT VIEW

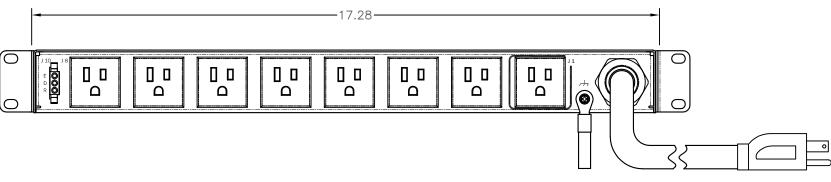

<u>REAR VIEW</u>

Configuration	Features	VMtr, AMtr, rEPO, Seq, EMI, Srg	
	Layout	10	
Input 1	Voltage	120 Vac, Single Phase, 50/60 Hz	
	Max Current	15 Amps	
	Max Load	1.44 KVA	Ор
	Connection	5-15P, 9 ft cord, 3-wire 14 ga, SJT jacket (Rear panel)	
	Voltage Monitor	Digital, ±1% Full Scale	
	Current Monitor	Digital, ±1% Full Scale	Co
Outlets	All Panels [1][2]	(1) 5-15R, 120V	
		(8) 5-15R, 120V (S)	
Protection	Spike/Surge Suppression [1]	Yes	No [1]
	EMI Filter [1]	Yes	[2]
	Over Current [1]	(1) 15A Main Breaker	
Env Sensors	Temperature	2	
	Humidity	2	
	Interlocks	None	
	EPO	Remote EPO Type N.O./N.O.	
Communications	Display	Multi-function Controller	
	Serial	RS-232 (RJ-45)	
	Ethernet	10T/100T Auto	
	Protocols	HTTP, HTTPS, Telnet, SSH, FTP, SMTP, SNMPv2, SNMPv3, SNTP, AlertLog	

Physical	Dimensions	1 U x 19" W x 13" D
	Weight	lbs
	Materials	Chassis: Steel
	Finishes	Chassis: Zinc plated Black,
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.com
	Safety Certifications	None
	Environment Certifications	None
Notes:		
[1] Certain details	of the circuitry may only be revea	aled by the schematic (availat
[2] S = switched, V	/ = monitored voltage, A = monito	red amps

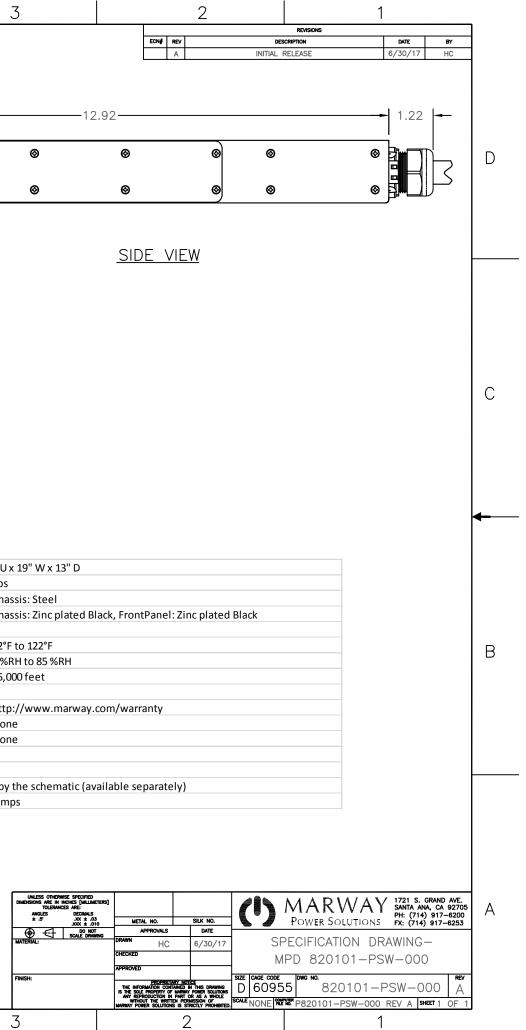

В

D

С