
7	6	5	4	3




FRONT VIEW

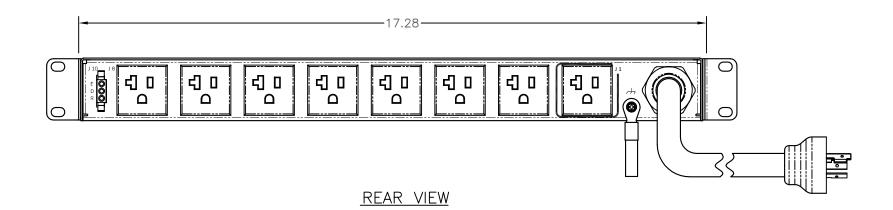

Configuration	Features	rEPO, Seq, EMI, Srg	Physical
	Layout	10	
Input 1	Voltage	120 Vac, Single Phase, 50/60 Hz	
	Max Current	30 Amps	
	Max Load	2.88 KVA	Operating
	Connection	L5-30P, 9 ft cord, 3-wire 10 ga, SJT jacket (Rear panel)	
	Voltage Monitor	None	
	Current Monitor	None	Conforma
Outlets	All Panels [1][2]	(1) 5-20R, 120V	
		(8) 5-20R, 120V (S)	
			Notes:
Protection	Spike/Surge Suppression [1]	Yes	[1] Certair
	EMI Filter [1]	Yes	[2] S = swi
	Over Current [1]	(2) 20A Circuit Breaker	
Env Sensors	Temperature	2	
	Humidity	2	
	Interlocks	None	
	EPO	Remote EPO Type N.O./N.O.	
Communications	Display	None	
	Serial	RS-232 (RJ-45)	
	Ethernet	10T/100T Auto	
	Protocols	HTTP, HTTPS, Telnet, SSH, FTP, SMTP, SNMPv2, SNMPv3, SNTP, AlertLog	

Physical	Dimensions	1 U x 19" W x 13" D	
	Weight	lbs	
	Materials	Chassis: Steel	
	Finishes	Chassis: Zinc plated B	
	T	22%5 1 4 22%5	
Operating	Temperature	32°F to 122°F	
	Humidity	5 %RH to 85 %RH	
	Elevation	25,000 feet	
Conformance	Warranty	http://www.marway.	
	Safety Certifications	None	
	Environment Certifications	None	
Notes:			
[1] Certain details	of the circuitry may only be reveal	ed by the schematic (avai	
[2] S = switched, \	<pre>/ = monitored voltage, A = monitore</pre>	ed amps	

4

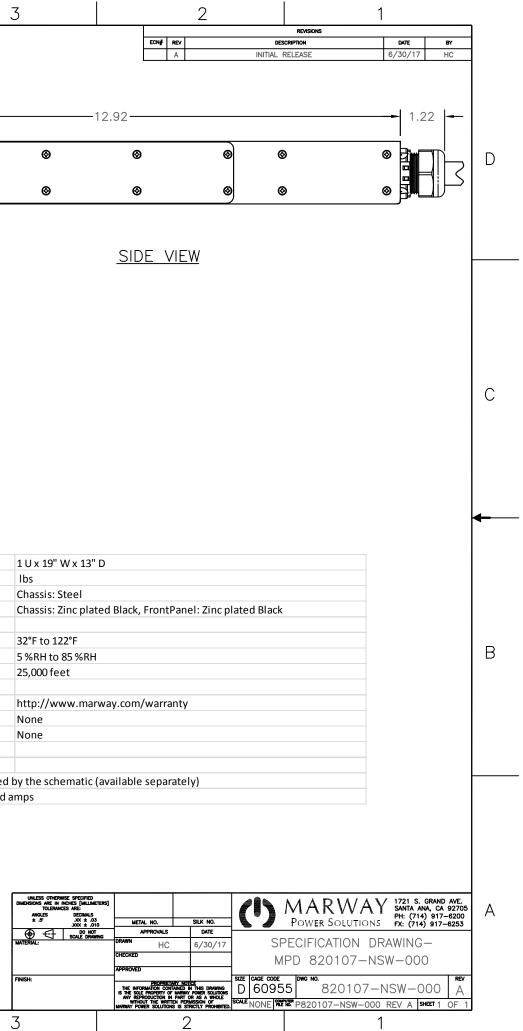

В

D

С

А

8

7

8

6

5