
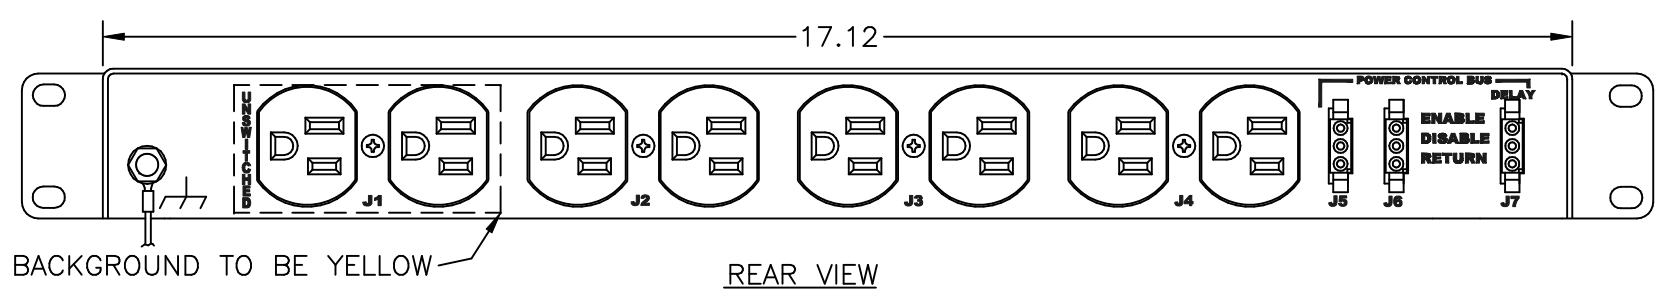
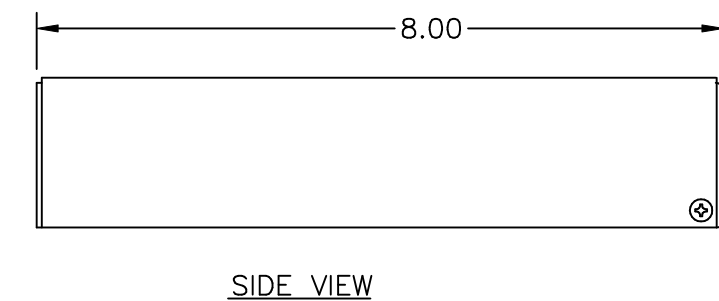


REVISIONS				
ECN#	REV	DESCRIPTION	DATE	BY
	A	INITIAL RELEASE	7/31/12	HC

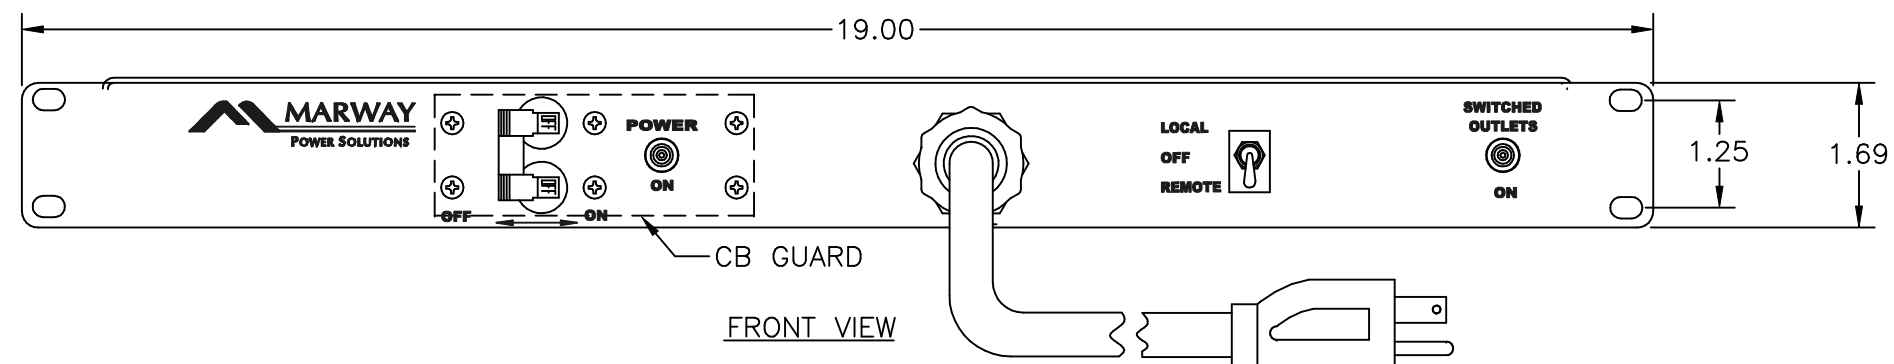

BACKGROUND TO BE YELLOW

Configuration	Type	Basic	
	Layout	1 U	
Input 1	Voltage	120 VAC, Single Phase, 50/60 Hz	
	Max Current	15 Amps	
	Max Load	1.44 KVA	
	Connection	5-15P, 9 ft cord, 3-wire 14 ga, SJT jacket (Front panel)	
	Voltage Monitor	None	
	Current Monitor	None	
	Outlets	All Panels [1][2]	(2) 5-15R, 120V (6) 5-15R, 120V (S)
Protection		Spike/Surge Suppression [1]	Yes
		EMI Filter [1]	Yes
	Over Current [1]	(1) 15A Main Breaker	
Env Sensors	Temperature	None	
	Humidity	None	
	Interlocks	None	
	EPO	None	
Communications	Display	None	
	Serial	None	
	Ethernet	None	
	Protocols	None	

Physical	Dimensions	1 U x 19" W x 8" D
	Weight	lbs
	Materials	Chassis: Steel
	Finishes	Chassis: Zinc plated Black, FrontPanel: Zinc plated Black
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.com/warranty
	Safety Certifications	None
	Environment Certifications	None
Notes:		
[1] Certain details of the circuitry may only be revealed by the schematic (available separately)		
[2] S = switched, V = monitored voltage, A = monitored amps		

<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:</small> <small>ANGLES DECIMALS</small> <small>.XX ± .03</small> <small>.XXX ± .010</small> <small>DO NOT SCALE DRAWING</small>	MATERIAL:	APPROVALS	DATE	 1721 S. GRAND AVE. SANTA ANA, CA 92705 PH: (714) 917-8200 FX: (714) 917-8253	
	FINISH:	DRAWN	7/31/12		
		CHECKED			
		APPROVED			
<small>DISCREETARY NOTICE</small> <small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MARWAY POWER SOLUTIONS IS STRICTLY PROHIBITED.</small>		SIZE	CAGE CODE	DWG NO.	
		D	60955	P100R-109	
		SCALE	NONE	P100R-109 REV A	
				SHEET 1 OF 1	