

5

Δ

FRONT VIEW

6

7

SIDE VIEW

1 U x 19" W x 9" D

Chassis: Steel

32°F to 122°F

5 %RH to 85 %RH 25,000 feet


UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLENANCES ARE: ANGLES DECIMALS ±.5' JXX ±.03 DO NOT SCALE DRAWING

UL None

3

4

3

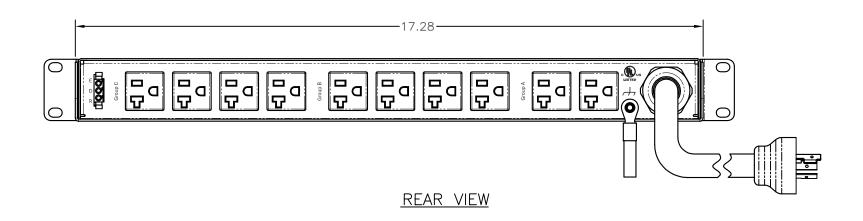

6

Configuration	Features	rEPO, EMI, Srg	Physical	Dimensions	1 U x
	Layout	1U		Weight	lbs
				Materials	Chas
Input 1	Voltage	120 Vac, Single Phase, 50/60 Hz		Finishes	Chas
	Max Current	20 Amps			
	Max Load	1.92 KVA	Operating	Temperature	32°F
				Humidity	5 %R
	Connection	L5-20P, 9 ft cord, 3-wire 12 ga, SJT jacket (Rear panel)		Elevation	25,00
	Voltage Monitor	None			
	Current Monitor	None	Conformance	Warranty	http:
				Safety Certifications	UL
Outlets	All Panels [1][2]	(4) 5-20R, 120V		Environment Certifications	None
		(8) 5-20R, 120V (S)			
			Notes:		
Protection	Spike/Surge Suppression [1]	Yes	[1] Certain details	of the circuitry may only be revealed	d by the
	EMI Filter [1]	Yes	[2] S = switched, V	= monitored voltage, A = monitored	lamps
	Over Current [1]	(1) 20A Main Breaker	-		
Env Sensors	Temperature	None	-		
	Humidity	None			
	Interlocks	None			
	EPO	Remote EPO Type N.O./N.O.			UNL
Communications	Display	None	-		
	Serial	None			DO MATERIA
	Ethernet	None			
	Ethemet	None			

5

В

D

С

8

А

8

7

