

5

FRONT VIEW

D

С


В

А

8

7

<u>SIDE VIEW</u>

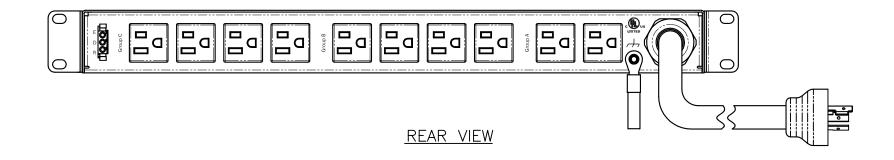

Configuration	Features	VMtr, AMtr, rEPO, Seq, Srg
	Layout	1U
Input 1	Voltage	120 Vac, Single Phase, 50/60 Hz
	Max Current	30 Amps
	Max Load	2.88 KVA
	Connection	L5-30P, 9 ft cord, 3-wire 10 ga, SJT jacket (Rear panel)
	Voltage Monitor	Digital, ±1%
	Current Monitor	Digital, ±1%
Outlets	All Panels [1][2]	(4) 5-15R, 120V
		(8) 5-15R, 120V (S)
Protection	Spike/Surge Suppression [1]	Yes
	EMI Filter [1]	None
	Over Current [1]	(2) 15A Circuit Breaker
Env Sensors	Temperature	None
	Humidity	None
	Interlocks	None
	EPO	Remote EPO Type N.O./N.O.
Communications	Display	Multi-function Controller
	Serial	None
	Ethernet	None
	Protocols	None

6

Physical	Dimensions	1 U x 19" W x 9" D
	Weight	lbs
	Materials	Chassis: Steel
	Finishes	Chassis: Zinc plated Black,
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.com/
	Safety Certifications	UL
	Environment Certifications	None
Notes:		
[1] Certain details	s of the circuitry may only be revea	aled by the schematic (availabl

[1] Certain details of the circuitry may only be revealed by the schematic (availa
[2] S = switched, V = monitored voltage, A = monitored amps

4

UNLESS OTHERMISE SPECIFIED DMERCICINE ME IN INCLES TOLEMACES AND ALL IN INCLES ANGLES DECIMALS ± .3 _______XX _ .030 DO NOT SCALE DRAWING MATERIAL: FINISH:

