




REV#		REV	DESCRIPTION	DATE	BY
	A		INITIAL RELEASE	7/16/10	HC

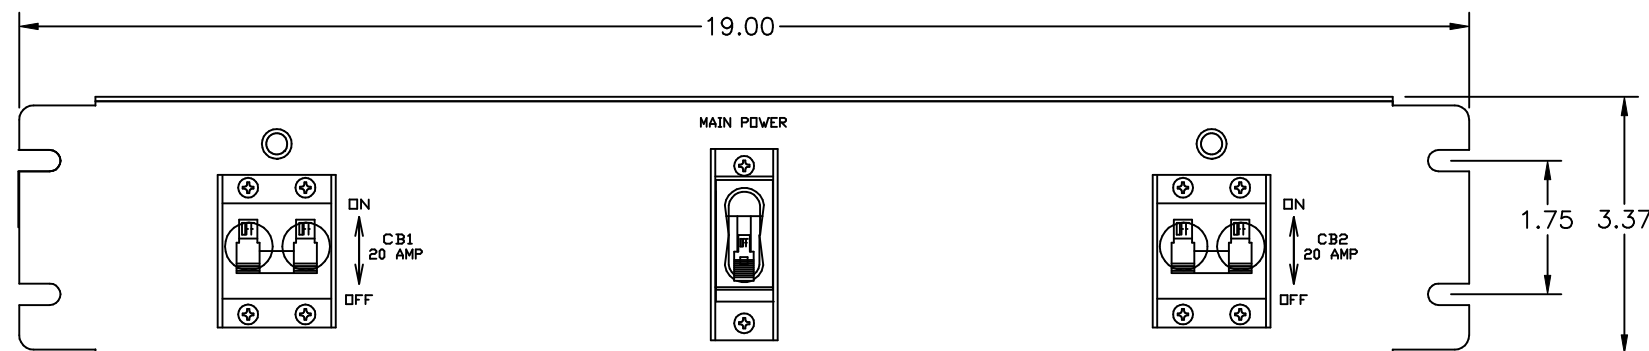

FRONT VIEW

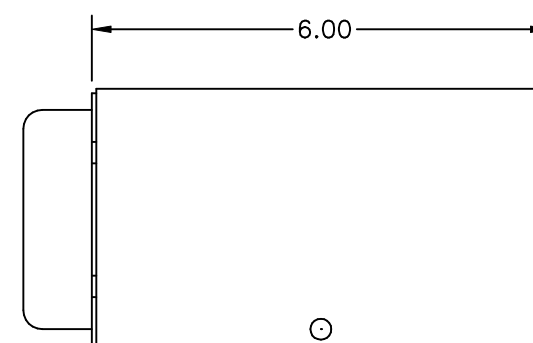

SIDE VIEW

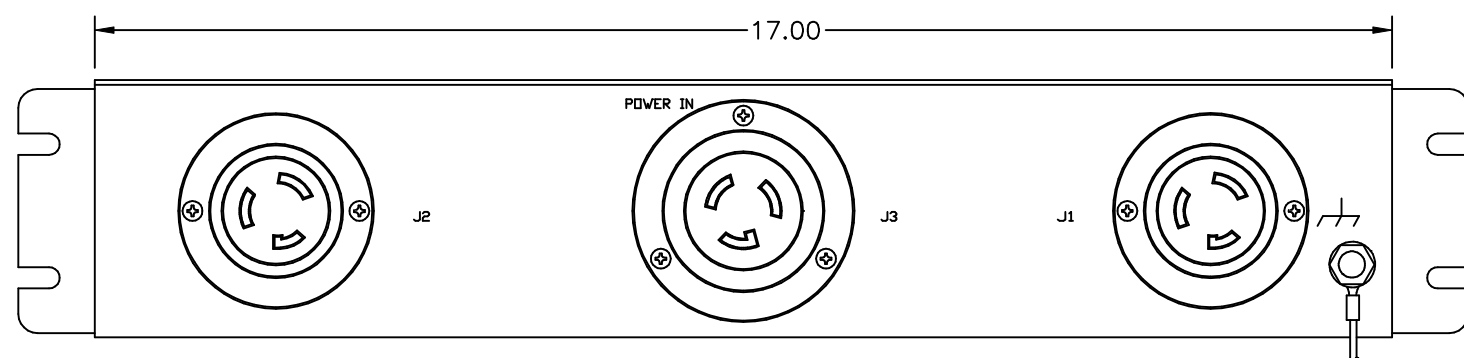

REAR VIEW

Configuration	Type	Basic
	Layout	2 U
Input 1	Voltage	120 VAC, Single Phase, 50/60 Hz
	Max Current	30 Amps
	Max Load	2.88 KVA
	Connection	L5-30P
	Voltage Monitor	None
	Current Monitor	None
Outlets	All Panels [1][2]	(2) L5-20R, 120V
Protection	Spike/Surge Suppression [1]	Yes
	EMI Filter [1]	None
	Over Current [1]	(1) 30A Main Breaker (2) 20A Circuit Breaker
Env Sensors	Temperature	None
	Humidity	None
	Interlocks	None
	EPO	None
Communications	Display	None
	Serial	None
	Ethernet	None
	Protocols	None

Physical	Dimensions	2 U x 19" W x 6" D
	Weight	lbs
	Materials	Chassis: Steel
	Finishes	Chassis: Zinc plated Gold, FrontPanel: Painted GREEN
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.com/warranty
	Safety Certifications	None
	Environment Certifications	None
Notes:	[1] Certain details of the circuitry may only be revealed by the schematic (available separately) [2] S = switched, V = monitored voltage, A = monitored amps	

PROPRIETARY NOTICE
 ALL PATENT OR OTHER PROPRIETARY RIGHTS PERTAINING TO THE ITEMS SOLD HERE UNDER SHALL REMAIN THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS EXCEPT THAT THE PURCHASER SHALL HAVE THE RIGHT TO USE SUCH ITEMS FOR THEIR INTENDED PURPOSE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ANGLES DECIMALS ± 1/2° .03 .XXX ± .010 DO NOT SCALE DRAWING		METAL NO.	SILK NO.
MATERIAL:		APPROVALS	DATE
FINISH:		DRAWN	7/16/10
		CHECKED	
		APPROVED	
SIZE	FSCM NO.	DWG NO.	REV
D	60955	411123-006	A
SCALE	NONE	P411123-006 REV A	SHEET 1 OF 1

MARWAY 17500 GILLETTE AVE.
 IRVINE, CA 92614
 Ph (714) 917-6200
 FAX (714) 917-6253
 TOLL FREE 800 462-7929

POWER SOLUTIONS

SPECIFICATION DRAWING-
 MPD 411123-006