


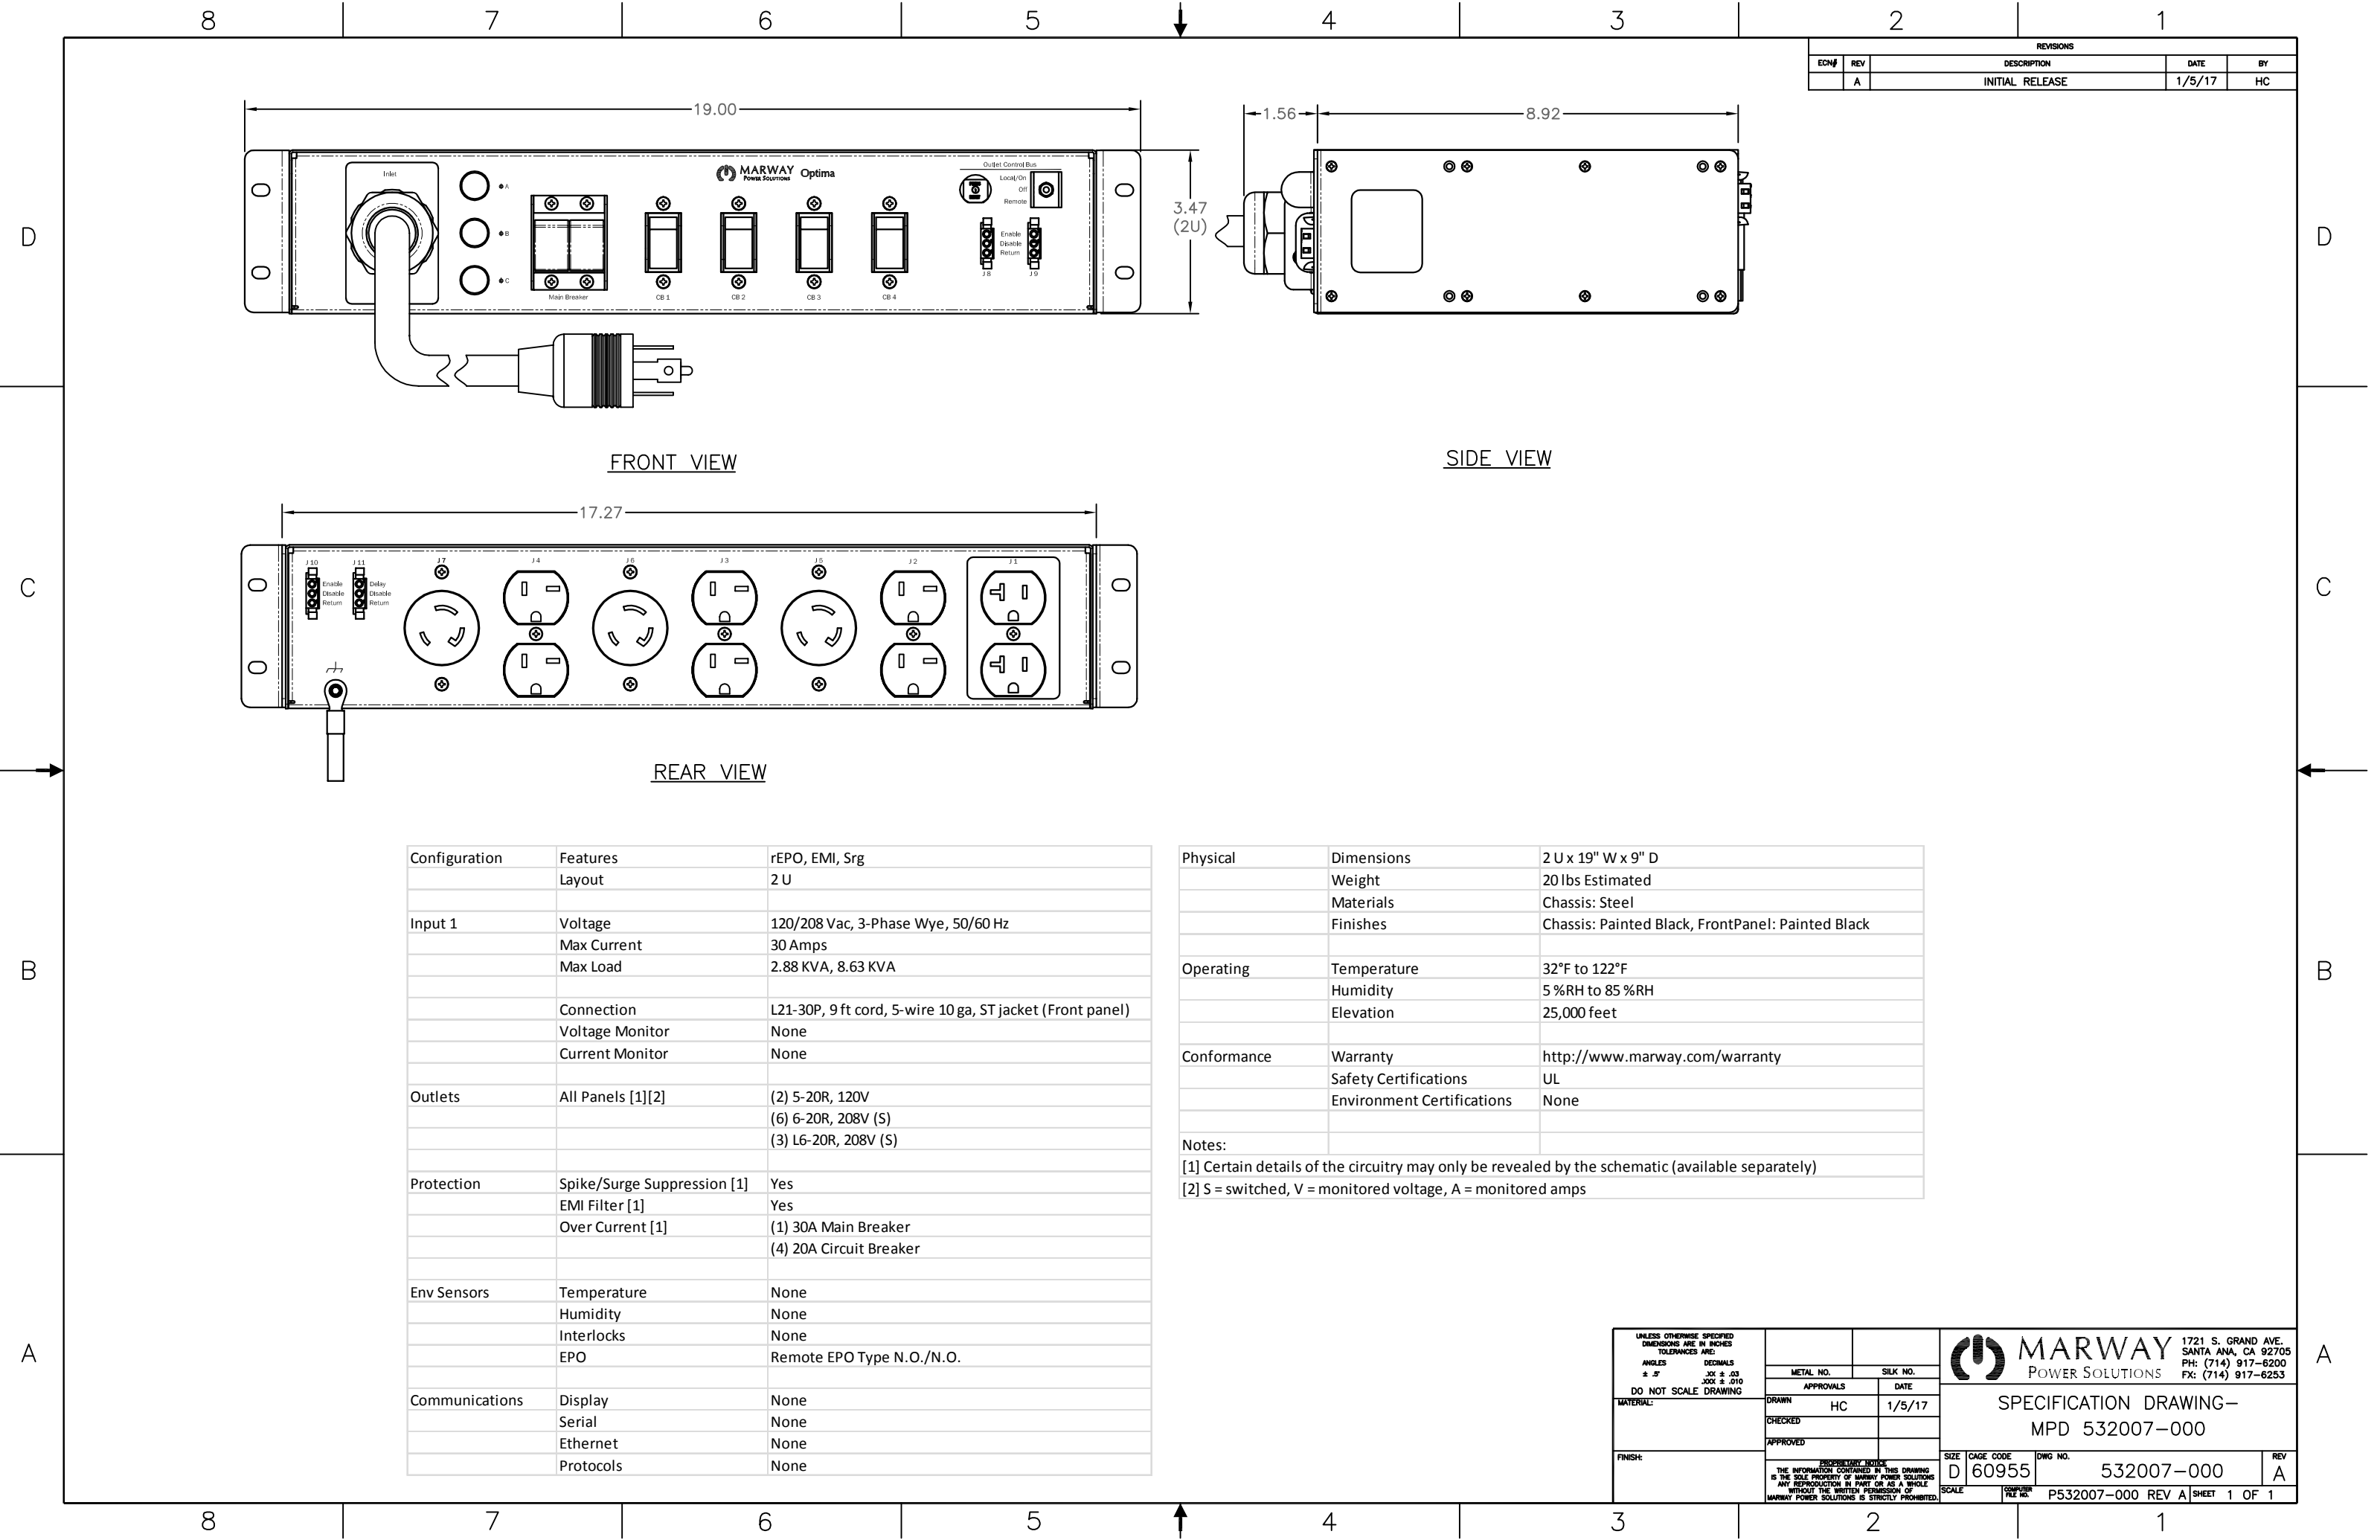

REVISIONS				
ECN#	REV	DESCRIPTION	DATE	BY
	A	INITIAL RELEASE	1/5/17	HC

Configuration	Features	rEPO, EMI, Srg
	Layout	2 U
Input 1	Voltage	120/208 Vac, 3-Phase Wye, 50/60 Hz
	Max Current	30 Amps
	Max Load	2.88 KVA, 8.63 KVA
	Connection	L21-30P, 9 ft cord, 5-wire 10 ga, ST jacket (Front panel)
Outlets	Voltage Monitor	None
	Current Monitor	None
	All Panels [1][2]	(2) 5-20R, 120V
		(6) 6-20R, 208V (S)
Protection		(3) L6-20R, 208V (S)
	Spike/Surge Suppression [1]	Yes
	EMI Filter [1]	Yes
	Over Current [1]	(1) 30A Main Breaker
Env Sensors		(4) 20A Circuit Breaker
	Temperature	None
	Humidity	None
	Interlocks	None
Communications	EPO	Remote EPO Type N.O./N.O.
	Display	None
	Serial	None
	Ethernet	None
	Protocols	None

Physical	Dimensions	2 U x 19" W x 9" D
	Weight	20 lbs Estimated
	Materials	Chassis: Steel
	Finishes	Chassis: Painted Black, FrontPanel: Painted Black
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.com/warranty
	Safety Certifications	UL
	Environment Certifications	None
Notes:		
[1] Certain details of the circuitry may only be revealed by the schematic (available separately)		
[2] S = switched, V = monitored voltage, A = monitored amps		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ANGLES DECIMALS
± .5° .001 ± .03
DO NOT SCALE DRAWING

MATERIAL:

FINISH:

METAL NO.

SILK NO.

APPROVALS

DATE

DRAWN

CHECKED

APPROVED

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MARWAY POWER SOLUTIONS IS STRICTLY PROHIBITED.

PROPRIETARY NOTICE

1721 S. GRAND AVE.
SANTA ANA, CA 92705
PH: (714) 917-6200
FX: (714) 917-6253

MARWAY
POWER SOLUTIONS

SPECIFICATION DRAWING—
MPD 532007-000

SIZE

CAGE CODE

DWG NO.

REV

SCALE

COMPUTER FILE NO.

P532007-000 REV A

SHEET 1 OF 1