


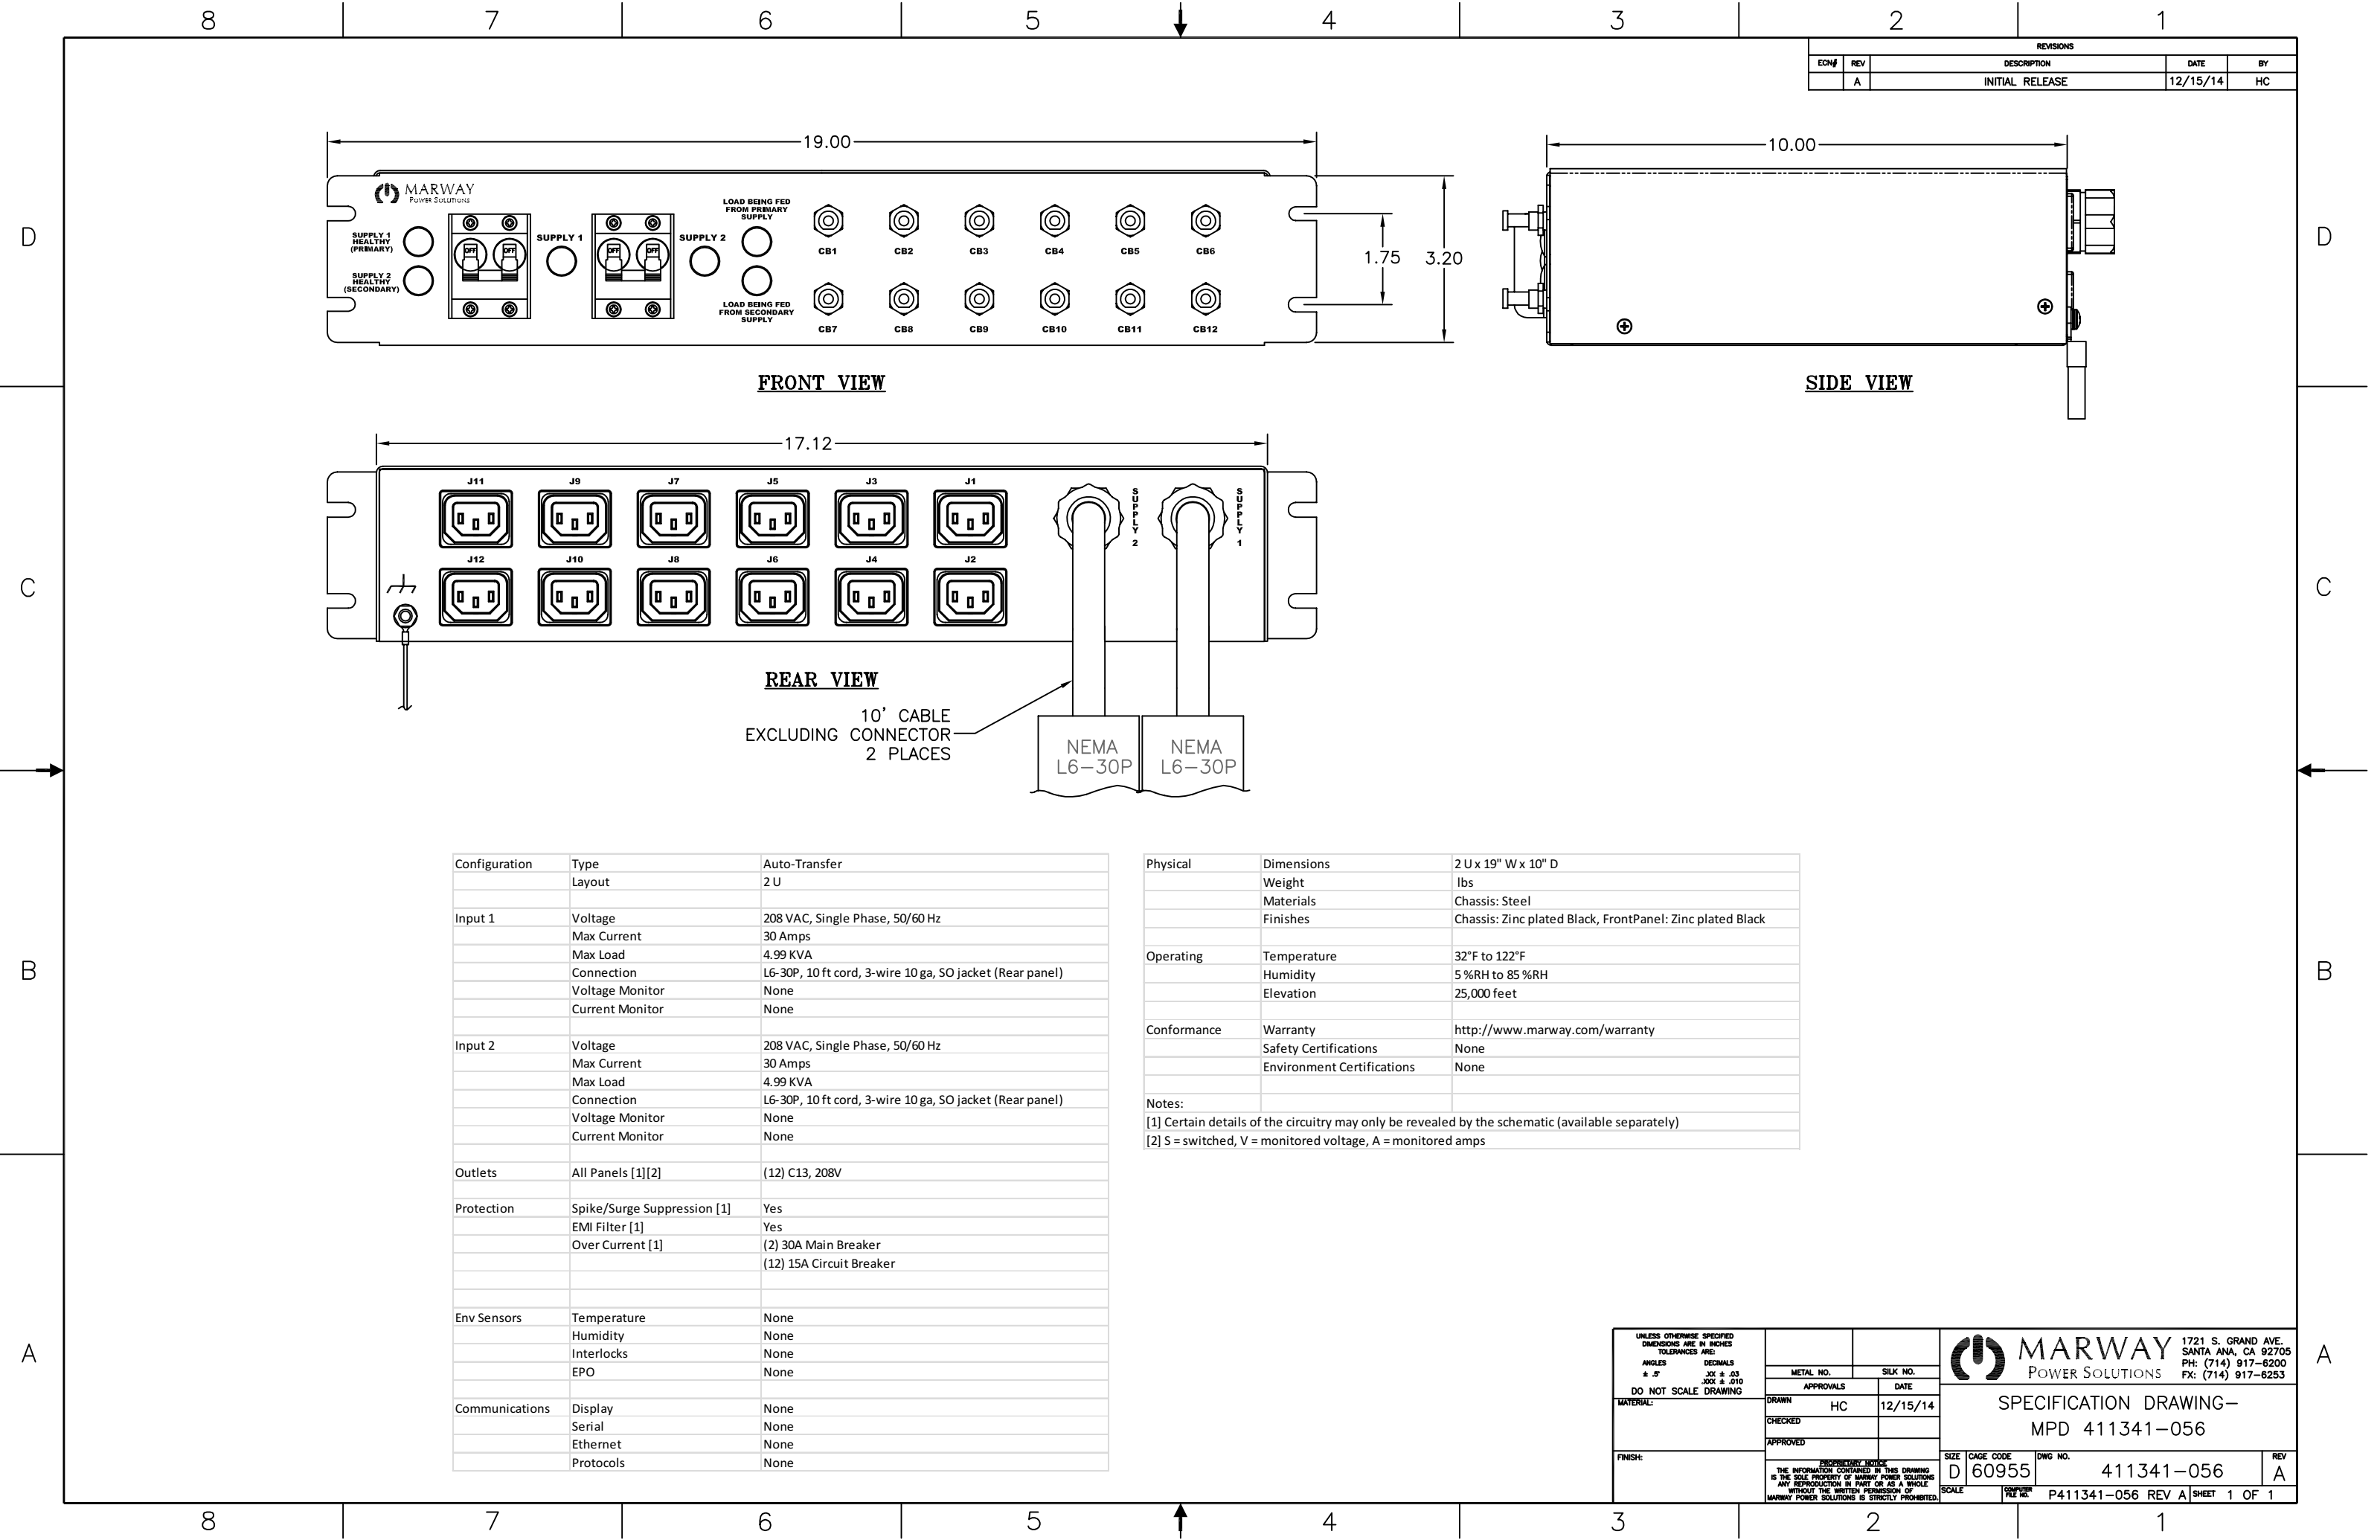

Configuration	Type	Auto-Transfer
	Layout	2 U
Input 1	Voltage	208 VAC, Single Phase, 50/60 Hz
	Max Current	30 Amps
	Max Load	4.99 KVA
	Connection	L6-30P, 10 ft cord, 3-wire 10 ga, SO jacket (Rear panel)
	Voltage Monitor	None
	Current Monitor	None
Input 2	Voltage	208 VAC, Single Phase, 50/60 Hz
	Max Current	30 Amps
	Max Load	4.99 KVA
	Connection	L6-30P, 10 ft cord, 3-wire 10 ga, SO jacket (Rear panel)
	Voltage Monitor	None
	Current Monitor	None
Outlets	All Panels [1][2]	(12) C13, 208V
Protection	Spike/Surge Suppression [1]	Yes
	EMI Filter [1]	Yes
	Over Current [1]	(2) 30A Main Breaker (12) 15A Circuit Breaker
Env Sensors	Temperature	None
	Humidity	None
	Interlocks	None
	EPO	None
Communications	Display	None
	Serial	None
	Ethernet	None
	Protocols	None

Physical	Dimensions	2 U x 19" W x 10" D
	Weight	lbs
	Materials	Chassis: Steel
	Finishes	Chassis: Zinc plated Black, FrontPanel: Zinc plated Black
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.com/warranty
	Safety Certifications	None
	Environment Certifications	None
Notes:		
[1] Certain details of the circuitry may only be revealed by the schematic (available separately)		
[2] S = switched, V = monitored voltage, A = monitored amps		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ANGLES DECIMALS
± .5° .001 ± .010
DO NOT SCALE DRAWING

MATERIAL:

FINISH:

METAL NO.

SILK NO.

APPROVALS

DATE

DRAWN

CHECKED

APPROVED

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MARWAY POWER SOLUTIONS IS STRICTLY PROHIBITED.

PROPRIETARY NOTICE

MARWAY POWER SOLUTIONS

1721 S. GRAND AVE.
SANTA ANA, CA 92705
PH: (714) 917-6200
FX: (714) 917-6253

SPECIFICATION DRAWING—
MPD 411341-056

SIZE D 60955

CAGE CODE

DWG NO. 411341-056

REV A

SCALE

COMPUTER FILE NO. P411341-056 REV A

SHEET 1 OF 1