

## <u>REAR VIEW</u>

6

Configuration	Features	Seq, Srg	Physical	Dimensions	1 U x 19" W x 9" D
	Layout	1U		Weight	lbs
				Materials	Chassis: Steel
Input 1	Voltage	200-240 Vac, Single Phase, 50/60 Hz		Finishes	Chassis: Zinc plated I
	Max Current	30 Amps			
	Max Load	5.76 KVA	Operating	Temperature	32°F to 122°F
				Humidity	5 %RH to 85 %RH
	Connection	L6-30P, 9 ft cord, 3-wire 10 ga, SJT jacket (Rear panel)		Elevation	25,000 feet
	Voltage Monitor	None			
	Current Monitor	None	Conformance	Warranty	http://www.marway
				Safety Certifications	None
Outlets	All Panels [1][2]	(1) C13, 200-240V		<b>Environment Certifications</b>	None
		(8) C13, 200-240V (S)			
			Notes:		
Protection	Spike/Surge Suppression [1]	Yes	[1] Certain details of the circuitry may only be revealed by the schematic (ava		
	EMI Filter [1]	None	[2] S = switched, V = monitored voltage, A = monitored amps		
	Over Current [1]	(2) 15A Circuit Breaker			
Env Sensors	Temperature	2			
	Humidity	2			
	Interlocks	None			
	EPO	None			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MILLIMETERS] TOLERWICES ARE: ANGLES DECIMALS ±.5° JOX ±.03
Communications	Display	None			ANGLES DECIMALS ± .5' .XX ± .03 .XX ± .010 
	Serial	RS-232 (RJ-45)			MATERIAL:
	Ethernet	10T/100T Auto			
	Protocols	HTTP, HTTPS, Telnet, SSH, FTP, SMTP, SNMPv2, SNMPv3, SNTP, AlertLog			FINISH:

5

В


D

С

А

8

7

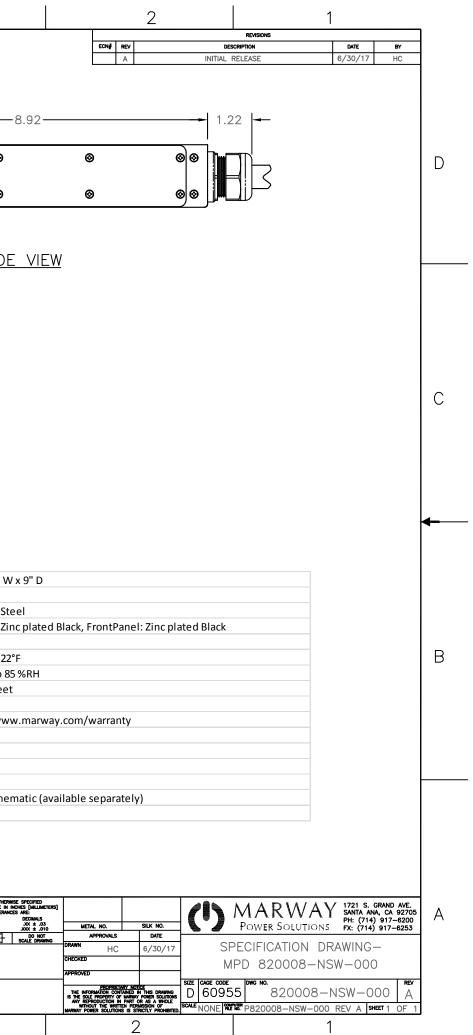

3

4