




| REVISIONS |     |                 |          |    |
|-----------|-----|-----------------|----------|----|
| ECN#      | REV | DESCRIPTION     | DATE     | BY |
|           | A   | INITIAL RELEASE | 10/24/14 | HC |

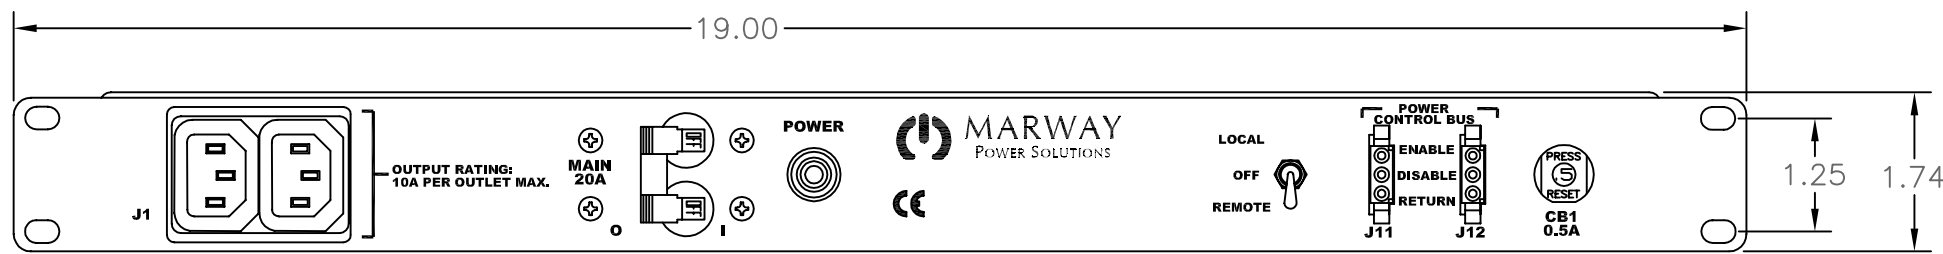

FRONT VIEW

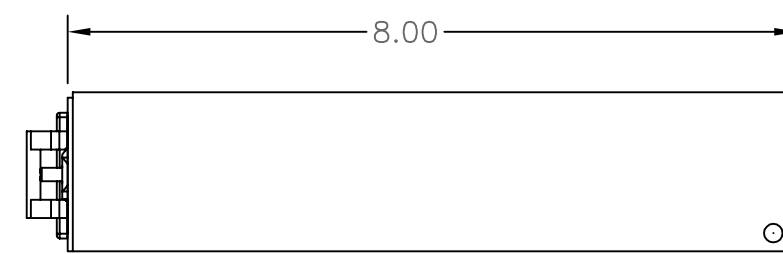

SIDE VIEW

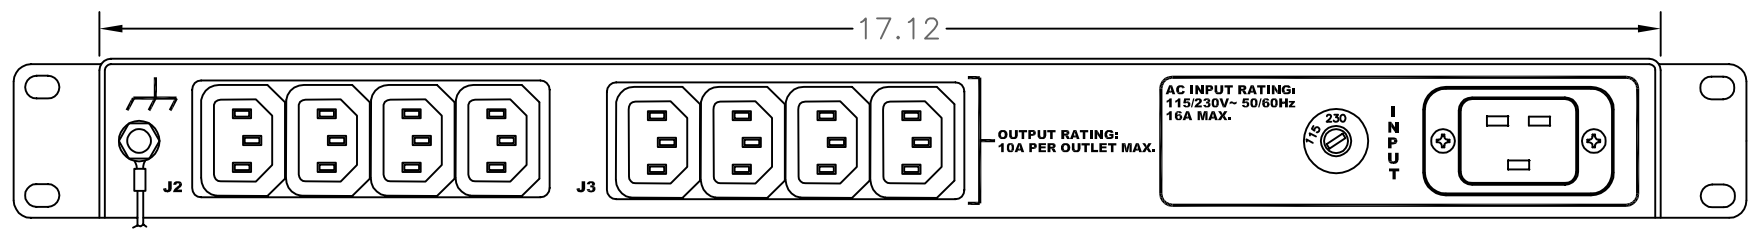

REAR VIEW

|                |                             |  |
|----------------|-----------------------------|--|
| Configuration  | Type                        | Remote EPO                                     |
|                | Layout                      | 1 U  |
| Input 1        | Voltage                     | 115/230 VAC Selectable, Single Phase, 50/60 Hz |
|                | Max Current                 | 20 Amps  |
|                | Max Load                    | 1.84 KVA or 3.68 KVA                           |
|                | Connection                  | C20  |
|                | Voltage Monitor             | None   |
|                | Current Monitor             | None   |
| Outlets        | All Panels [1][2]           | (2) C13, 115/230V<br>(8) C13, 115/230V (S)     |
| Protection     | Spike/Surge Suppression [1] | Yes  |
|                | EMI Filter [1]              | Yes  |
|                | Over Current [1]            | (1) 20A Main Breaker                           |
| Env Sensors    | Temperature                 | None   |
|                | Humidity                    | None   |
|                | Interlocks                  | None   |
|                | EPO                         | Remote EPO Type N.O./N.O.                      |
| Communications | Display                     | None   |
|                | Serial                      | None   |
|                | Ethernet                    | None   |

|   |                            |   |
|---|----------------------------|---|
| Physical  | Dimensions                 | 1 U x 19" W x 8" D  |
|   | Weight                     | lbs   |
|   | Materials                  | Chassis: Steel  |
|   | Finishes                   | Chassis: Zinc plated Gold, FrontPanel: Zinc plated Gold                     |
| Operating   | Temperature                | 32°F to 122°F   |
|   | Humidity                   | 5 %RH to 85 %RH   |
|   | Elevation                  | 25,000 feet   |
| Conformance   | Warranty                   | <a href="http://www.marway.com/warranty">http://www.marway.com/warranty</a> |
|   | Safety Certifications      | CE  |
|   | Environment Certifications | None  |
| Notes:  |                            |   |
| [1] Certain details of the circuitry may only be revealed by the schematic (available separately) |                            |   |
| [2] S = switched, V = monitored voltage, A = monitored amps                                       |                            |   |

|  |  |              |  |             |
|--|--|--------------|--|-------------|
| <small>UNLESS OTHERWISE SPECIFIED<br/>DIMENSIONS ARE IN INCHES<br/>TOLERANCES ARE:<br/>ANGLES DECIMALS<br/>± .5° .XX ± .03<br/>XXX ± .010<br/>DO NOT SCALE DRAWING</small> | METAL NO.  | SILK NO.     | <p>1721 S. GRAND AVE.<br/>SANTA ANA, CA 92705<br/>PH: (714) 917-6200<br/>FX: (714) 917-6253</p> <p>SPECIFICATION DRAWING--<br/>MPD 100RIEC-005</p> |             |
|  | APPROVALS  |              |  | DATE        |
|  | DRAWN  |              |  | HC 10/24/14 |
|  | CHECKED  |              |  |             |
| MATERIAL:  | APPROVED   |              |  |             |
| FINISH:  | <small>PROPRIETARY NOTICE<br/>THE INFORMATION CONTAINED IN THIS DRAWING<br/>IS THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS<br/>ANY REPRODUCTION IN PART OR AS A WHOLE<br/>WITHOUT THE WRITTEN PERMISSION OF<br/>MARWAY POWER SOLUTIONS IS STRICTLY PROHIBITED.</small> |              |  |             |
| SIZE   | CAGE CODE  | DWG NO.      | REV  |             |
| D  | 60955  | P100RIEC-005 | A  |             |
| SCALE  | COMPUTER FILE NO. P100RIEC-005 REV A SHEET 1 OF 1  |              |  |             |