


5

FRONT VIEW

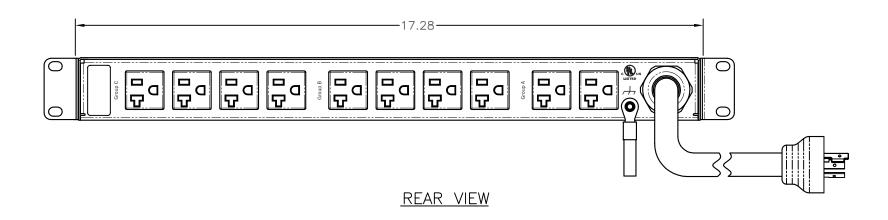


Configuration	Features	EMI, Srg	
	Layout	10	
Input 1	Voltage	120 Vac, Single Phase, 50/60 Hz	
	Max Current	30 Amps	
	Max Load	2.88 KVA	
	Connection	L5-30P, 9 ft cord, 3-wire 10 ga, SJT jacket (Rear panel)	
	Voltage Monitor	None	
	Current Monitor	None	
Outlets	All Panels [1][2]	(12) 5-20R, 120V	
Protection	Spike/Surge Suppression [1]	Yes	
	EMI Filter [1]	Yes	
	Over Current [1]	(2) 20A Circuit Breaker	
Env Sensors	Temperature	None	
	Humidity	None	
	Interlocks	None	
	EPO	None	
Communications	Display	None	
	Serial	None	
	Ethernet	None	
	Protocols	None	

6

Physical	Dimensions	1 U x 19" W x 9" D
	Weight	lbs
	Materials	Chassis: Steel
	Finishes	Chassis: Zinc plated Bla
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.co
	Safety Certifications	UL
	Environment Certifications	None
Notes:		
[1] Certain details	of the circuitry may only be revea	led by the schematic (avai

[2] S = switched, V = monitored voltage, A = monitored amps

4

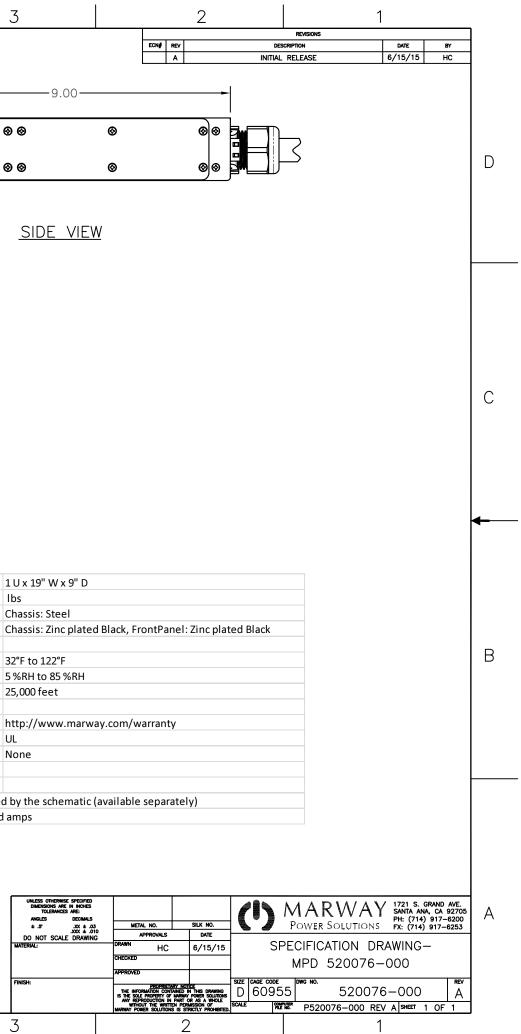

8

7

D

С

В

А