




REVISIONS				
ECN#	REV	DESCRIPTION	DATE	BY
	A	INITIAL RELEASE	6/30/17	HC

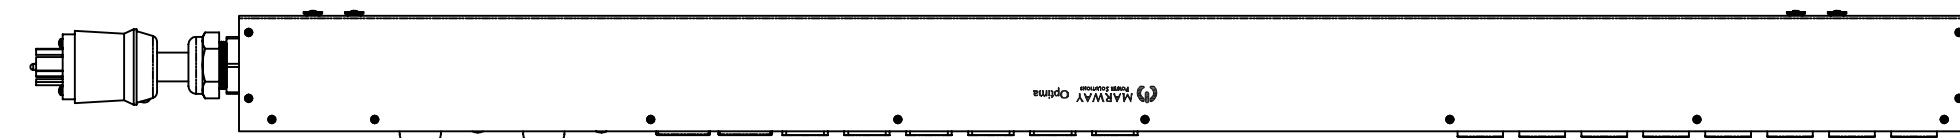

SIDE VIEW



FRONT VIEW

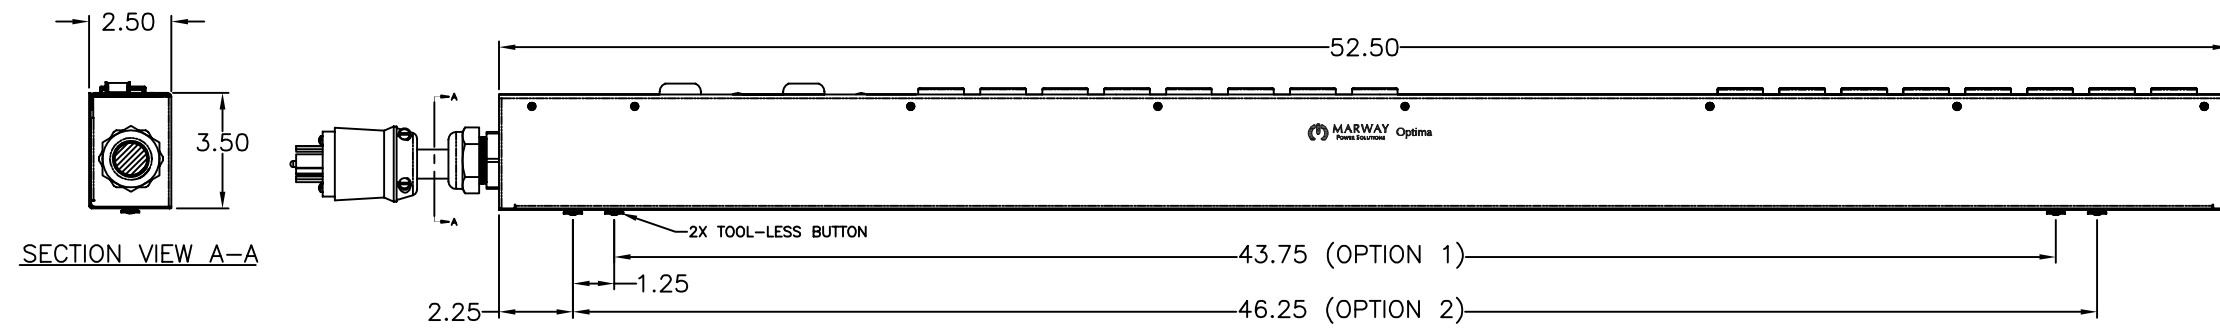

SIDE VIEW

Configuration	Features	VMtr, AMtr, Seq, Srg
	Layout	Zero U
Input 1	Voltage	200-240 Vac, Single Phase, 50/60 Hz
	Max Current	30 Amps
	Max Load	5.76 KVA
	Connection	L6-30P, 14 ft cord, 3-wire 10 ga, SJT jacket (Front panel)
Outlets	All Panels [1][2]	(12) C13, 200-240V (S) (4) C19, 200-240V (S)
	Protection	Spike/Surge Suppression [1] Yes EMI Filter [1] None Over Current [1] (2) 20A Circuit Breaker
	Env Sensors	Temperature 2 Humidity 2 Interlocks None EPO None
Communications	Display	Multi-function Controller
	Serial	RS-232 (RJ-45)
	Ethernet	10T/100T Auto
	Protocols	AlertLog, HTTP, HTTPS, Telnet, SSH, FTP, SMTP, SNMPv2, SNMPv3, SNTP

Physical	Dimensions	52.5" H x 2.5" W x 3.5" D
	Weight	lbs
	Materials	Chassis: Steel
Operating	Finishes	Chassis: Zinc plated Black, FrontPanel: Zinc plated Black
	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.com/warranty
	Safety Certifications	None
	Environment Certifications	None
Notes:		
[1] Certain details of the circuitry may only be revealed by the schematic (available separately)		
[2] S = switched, V = monitored voltage, A = monitored amps		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (MILLIMETERS) TOLERANCES ARE: ANGLES ± 1° DECIMALS .005 ± .003 DIMENSIONS .000 ± .010		METAL NO.		SILK NO.		 1721 S. GRAND AVE. SANTA ANA, CA 92705 PH: (714) 917-6200 FX: (714) 917-6253
DO NOT SCALE DRAWING		APPROVALS		DATE		
MATERIAL:		DRAWN		6/30/17		
FINISH:		CHECKED		APPROVED		
<small>PROPRIETARY NOTICE</small> THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MARWAY POWER SOLUTIONS IS STRICTLY PROHIBITED.		SIZE	CAGE CODE	DWG NO.	REV	
SCALE NONE		D	60955	829012-PSW-000	A	
		COMPUTER FILE NO.		P829012-PSW-000		SHEET 1 OF 1