
| 7 | 6 | 5 | ↓ 4 | 3 |
|---|---|---|-----|---|
| | | | | |



5

FRONT VIEW

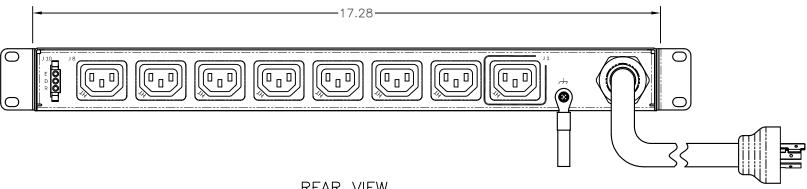


<u>REAR VIEW</u>

| Configuration | Features | rEPO, Seq, EMI, Srg | |
|----------------|-----------------------------|--|--|
| | Layout | 10 | |
| Input 1 | Voltage | 200-240 Vac, Single Phase, 50/60 Hz | |
| | Max Current | 20 Amps | |
| | Max Load | 3.84 KVA | |
| | Connection | L6-20P, 9 ft cord, 3-wire 12 ga, SJT jacket (Rear panel) | |
| | Voltage Monitor | None | |
| | Current Monitor | None | |
| Outlets | All Panels [1][2] | (1) C13, 200-240V | |
| | | (8) C13, 200-240V (S) | |
| Protection | Spike/Surge Suppression [1] | Yes | |
| | EMI Filter [1] | Yes | |
| | Over Current [1] | (1) 20A Main Breaker | |
| Env Sensors | Temperature | 2 | |
| | Humidity | 2 | |
| | Interlocks | None | |
| | EPO | Remote EPO Type N.O./N.O. | |
| Communications | Display | None | |
| | Serial | RS-232 (RJ-45) | |
| | Ethernet | 10T/100T Auto | |
| | Protocols | HTTP, HTTPS, Telnet, SSH, FTP, SMTP, SNMPv2, SNMPv3, SNTP, AlertLo | |

6

| Physical | Dimensions | 1 U x 19" W x 13" D |
|---------------------|--------------------------------------|---------------------------|
| | Weight | lbs |
| | Materials | Chassis: Steel |
| | Finishes | Chassis: Zinc plated Bl |
| | | |
| Operating | Temperature | 32°F to 122°F |
| | Humidity | 5 %RH to 85 %RH |
| | Elevation | 25,000 feet |
| | | |
| Conformance | Warranty | http://www.marway.o |
| | Safety Certifications | None |
| | Environment Certifications | None |
| Notes: | | |
| [1] Certain details | s of the circuitry may only be revea | led by the schematic (ava |
| [2] S = switched, \ | / = monitored voltage, A = monitor | ed amps |

4

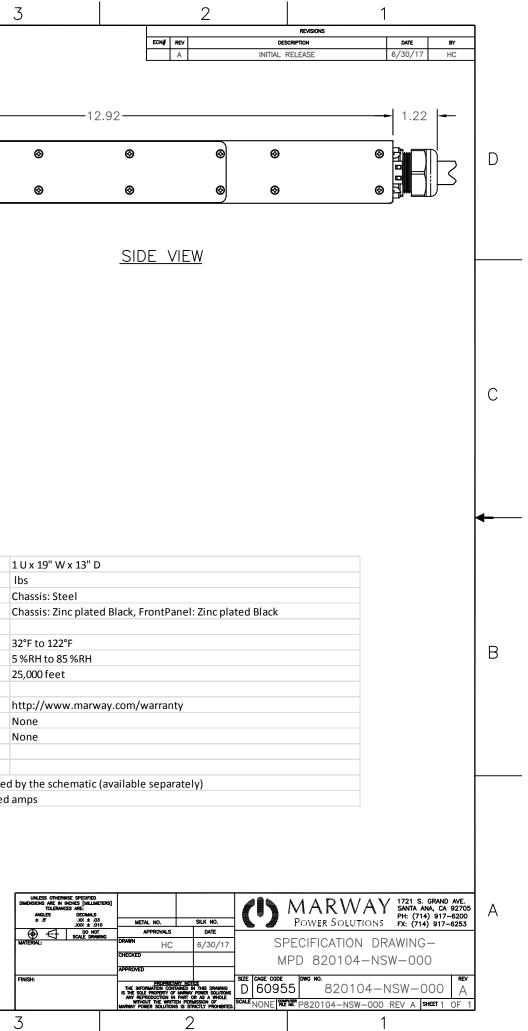

D

С

А

8

7

8