




REVISIONS				
ECN#	REV	DESCRIPTION	DATE	BY
	A	INITIAL RELEASE	8/7/12	HC

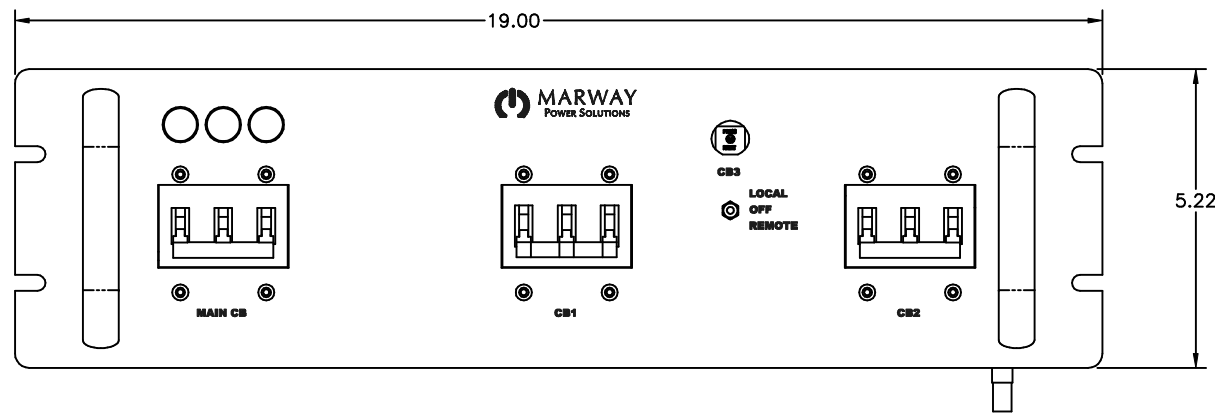

FRONT VIEW

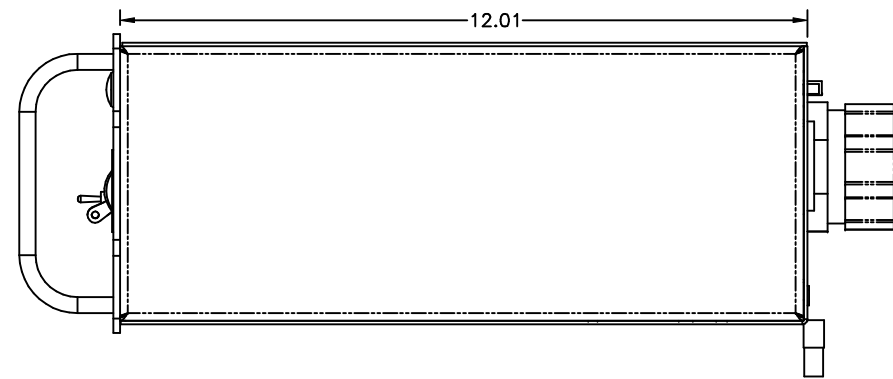

SIDE VIEW

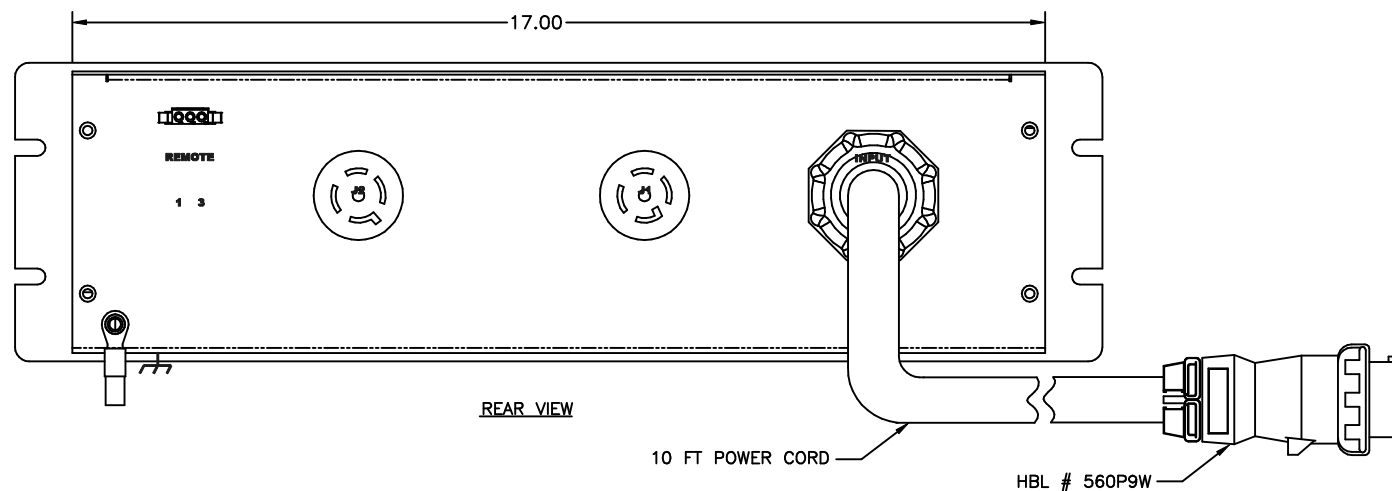

REAR VIEW

Configuration	Type	Basic
	Layout	3 U
Input 1	Voltage	120/208 VAC, 3-Phase Wye, 50/60 Hz
	Max Current	60 Amps
	Max Load	17.27 KVA
	Connection	HUBBELL #HBL560P9W, 10 ft cord, 5-wire 6 ga, SOOW jacket (Rear panel)
	Voltage Monitor	None
	Current Monitor	None
Outlets	All Panels [1][2]	(1) L21-20R, 120/208V (S) (1) L21-30R, 120/208V (S)
Protection	Spike/Surge Suppression [1]	Yes
	EMI Filter [1]	Yes
	Over Current [1]	(1) 60A Main Breaker (1) 30A Circuit Breaker (1) 20A Circuit Breaker
Env Sensors	Temperature	None
	Humidity	None
	Interlocks	None
	EPO	None
Communications	Display	None
	Serial	None
	Ethernet	None
	Protocols	None

Physical	Dimensions	3 U x 19" W x 12" D
	Weight	lbs
	Materials	Chassis: Steel
	Finishes	Chassis: Zinc plated Black, FrontPanel: Zinc plated Black
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	<a href="http://www.marway.com/warranty">http://www.marway.com/warranty</a>
	Safety Certifications	None
	Environment Certifications	None
Notes:		
[1] Certain details of the circuitry may only be revealed by the schematic (available separately)		
[2] S = switched, V = monitored voltage, A = monitored amps		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ANGLES DECIMALS ± .01 ± .03 ± .010 DO NOT SCALE DRAWING		METAL NO.		SILK NO.	
DRAWN		APPROVALS		DATE	
CHECKED		HC		8/7/12	
APPROVED					
FINISH:		SIZE		CAGE CODE	
D		60955		DWG NO.	
				41621-205	
		SCALE		REV	
		P41621-205 REV A		A	
		SHEET 1 OF 1			

DISCREETARY NOTICE  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MARWAY POWER SOLUTIONS IS STRICTLY PROHIBITED.

1721 S. GRAND AVE.  
SANTA ANA, CA 92705  
PH: (714) 917-8200  
FX: (714) 917-8253

**SPECIFICATION DRAWING—**  
MPD 41621-205