



REVISIONS				
ECN#	REV	DESCRIPTION	DATE	BY
	A	INITIAL RELEASE	6/12/15	HC



FRONT VIEW

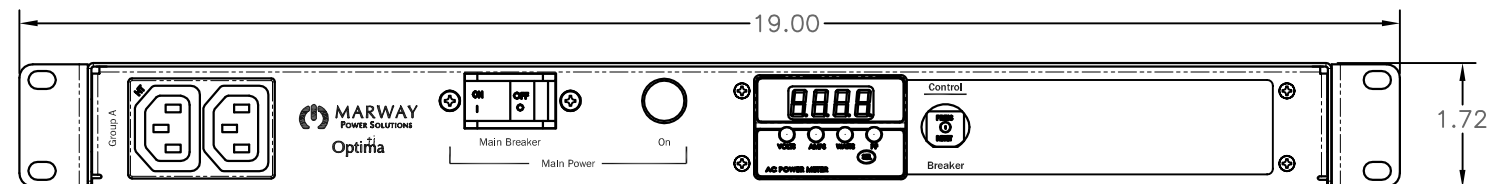

SIDE VIEW

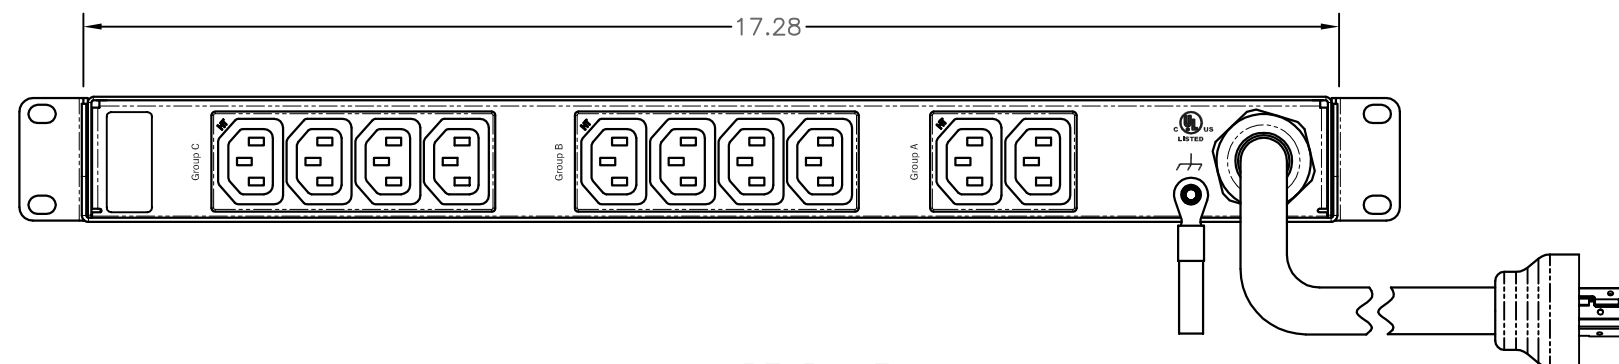

REAR VIEW

Configuration	Features	VMtr, AMtr, Srg
	Layout	1 U
Input 1	Voltage	200-240 Vac, Single Phase, 50/60 Hz
	Max Current	20 Amps
	Max Load	3.84 KVA
	Connection	L6-20P, 9 ft cord, 3-wire 12 ga, SJT jacket (Rear panel)
Protection	Voltage Monitor	Digital, ±1%
	Current Monitor	Digital, ±1%
	Spike/Surge Suppression [1]	Yes
Outlets	EMI Filter [1]	None
	Over Current [1]	(1) 20A Main Breaker
Env Sensors	All Panels [1][2]	(12) C13, 200-240V
	Temperature	None
	Humidity	None
	Interlocks	None
Communications	EPO	None
	Display	Multi-function Controller
	Serial	None
	Ethernet	None
	Protocols	None

Physical	Dimensions	1 U x 19" W x 9" D
	Weight	lbs
	Materials	Chassis: Steel
	Finishes	Chassis: Zinc plated Black, FrontPanel: Zinc plated Black
Operating	Temperature	32°F to 122°F
	Humidity	5 %RH to 85 %RH
	Elevation	25,000 feet
Conformance	Warranty	http://www.marway.com/warranty
	Safety Certifications	UL
	Environment Certifications	None
Notes:		
[1] Certain details of the circuitry may only be revealed by the schematic (available separately)		
[2] S = switched, V = monitored voltage, A = monitored amps		

<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:</small> <small>ANGLES ± .5°</small> <small>DECIMALS .XX ± .03</small> <small>XXX ± .010</small> <small>DO NOT SCALE DRAWING</small>	MATERIAL:			<p>1721 S. GRAND AVE. SANTA ANA, CA 92705 PH: (714) 917-6200 FX: (714) 917-6253</p> <p>SPECIFICATION DRAWING-- MPD 520043-000</p>
	FINISH:			
	APPROVALS	DATE		
	<small>PROPRIETARY NOTICE</small> <small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MARWAY POWER SOLUTIONS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MARWAY POWER SOLUTIONS IS STRICTLY PROHIBITED.</small>	<small>SCALE</small> D 60955	<small>COMPUTER FILE NO.</small> P520043-000 REV A SHEET 1 OF 1	